

POLYAMIDE PG STANDARD GLAND IP68 (COMPLETE WITH LOCKNUT)



SERIES

DESCRIPTION:

Polyamide PG Gland IP68 complete with Locknut

CONSTRUCTION:

Material Black or Grey Polyamide body

Seal Purbunan

Insert Polyamide traction relief clamping insert

CHARACTERISTICS:


Temperature Range -40 to 100°C. Up to 120°C for short periods

Protection Class Water Rating IP 68. Pressure Rating 5 bar

Other Silicone Free, Phosphorous Free, Cadmium free, Self Extinguishing

TYPICAL USES:

For watertight glanding of unscreened circular cables. Suitable for applications requiring optimum stress relief and a wide cable diameter clamping range.

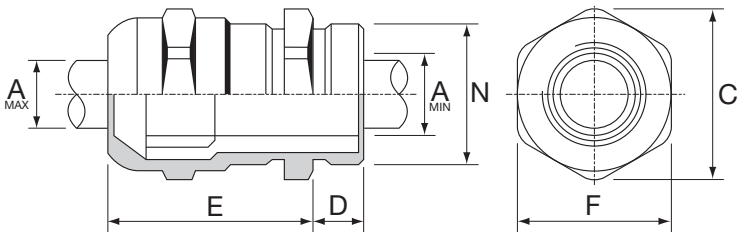

Part Number	Entry Thread PG	Thread Length mm	Cable Size Min – Max mm	Hexagonal Across Flats mm	Hexagonal Circumference mm	Assembled Length mm
AVAILABLE IN BLACK OR GREY (SUPPLIED COMPLETE WITH LOCKNUT)						
GPG11...	PG11	8.0	5.0 – 10.0	22.0	24.5	30.0
GPG13.5...	PG13.5	8.0	6.0 – 12.0	24.5	27.0	30.0
GPG16...	PG16	9.0	10.0 – 14.0	27.0	29.0	32.0
GPG21...	PG21	11.0	13.0 – 18.0	33.0	36.0	35.0
GPG29...	PG29	11.0	18.0 – 25.0	42.0	46.0	39.0
GPG36...	PG36	13.0	22.0 – 32.0	53.0	58.0	45.0

POLYAMIDE PG LOCKNUT



SERIES

Part Number	Entry Thread x Pitch mm	Hexagonal Across Flats mm	Hexagonal Circumference mm	Thickness mm
AVAILABLE IN BLACK OR GREY				
LNPG11...	PG11	24.0	26.0	5.0
LNPG13.5...	PG13.5	27.0	29.0	6.0
LNPG16...	PG16	31.0	33.5	6.0
LNPG21...	PG21	36.0	39.0	7.0

