

# POLYAMIDE PG GLAND IP68 C/W SPIRAL STRESS RELIEF SUPPORT (LESS LOCKNUT)



SERIES

## DESCRIPTION:

Polyamide PG Gland with support IP68 C/W Spiral Stress Relief Support (Less Locknut)

## CONSTRUCTION:

**Material** Black or Grey Polyamide body and spiral support.

**Seal** Purbunan

**Insert** Polyamide traction relief clamping insert

## CHARACTERISTICS:

**Temperature Range** -40 to 100°C. Up to 120°C for short periods


**Protection Class** Water Rating IP 68. Pressure Rating 5 bar

**Other** Silicone Free, Phosphorous Free, Cadmium free, Self Extinguishing

## TYPICAL USES:

For watertight glanding of unscreened circular cables with the added protection of a spiral strain relief. Suitable for applications requiring optimum stress relief and a wide cable diameter clamping range.

**NOTE** Supplied Less Locknut. Please Add As Required

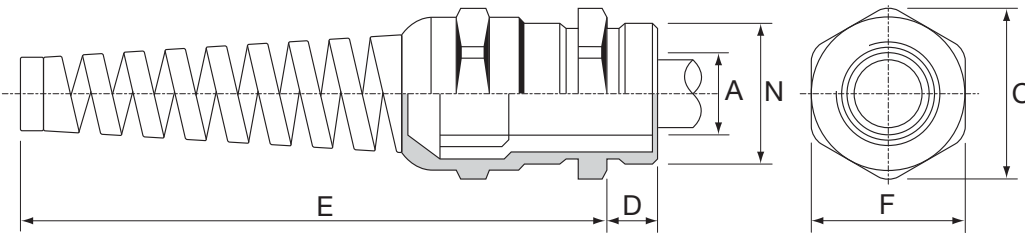

Part Number	Entry Thread PG	Thread Length mm	Cable Size Min – Max mm	Hexagonal Across Flats mm	Hexagonal Circumference mm	Assembled Length mm
AVAILABLE IN BLACK OR GREY ( SUPPLIED LESS LOCKNUT - PLEASE ADD AS REQUIRED )						
GPG11 SUP...	PG11	8.0	5.0 – 10.0	22.0	24.5	75.0
GPG13.5 SUP	PG13.5	9.0	6.0 – 12.0	24.0	26.5	87.0
GPG16 SUP...	PG16	10.0	10.0 – 14.0	27.0	30.0	95.0
GPG21 SUP...	PG21	11.0	13.0 – 18.0	33.0	32.0	110.0

# POLYAMIDE PG LOCKNUT



SERIES

Part Number	Entry Thread x Pitch mm	Hexagonal Across Flats mm	Hexagonal Circumference mm	Thickness mm
AVAILABLE IN BLACK OR GREY				
LNPG11...	PG11	24.0	26.0	5.0
LNPG13.5...	PG13.5	27.0	29.0	6.0
LNPG16...	PG16	31.0	33.5	6.0
LNPG21...	PG21	36.0	39.0	7.0

