

DOOR SWITCHES & DOOR MINDERS

Cupboard Door Switches	276
Infrared Door Minder	277



P: (09) 264 1000 | www.firstflex.co.nz

DOOR SWITCHES & DOOR MINDERS

Cupboard Door Switches

- > They have been architecturally designed for aesthetic appeal
- The screw heads are hidden by the caps supplied and camouflaged by attractive "star" embossing
- No manufacturer logotype imprints
- Easy screw terminations
- Pack includes spare block for sliding door applications
- Minimal size at just 55mm x 40mm x 25mm
- Unobtrusive in the home environment



Button Type - Cupboard Door Switch





Lever Type - Cupboard Door Switch



Both suitable for hinged or sliding doors



 ARM MAY BE

 BENT FOR

 ADJUSTMENT

 Pack Contains:

 1 Cupboard Door Switch, 1 Switch Cover, 1 Mounting Block, Two Screws and Screw Caps

DOOR SWITCHES & DOOR MINDERS

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

FIRST

DOOR SWITCHES & DOOR MINDERS

Infrared Door Minder

Plug & Play - Door Entry Alert System with **Reflector Beam**

- Easy to install with adjustable timer and volume
- ▶ Plug in power supply 230V
- Retro-reflection type
- Makes "ding-dong" sound or siren when beam is interrupted
- Speaker volume can be adjusted or turned off
- > Pack includes: sensor, reflector, alarm speaker, 9VDC adaptor mounting bracket & screw, installation manual
- ▶ When in siren mode, sounding time is adjustable from 3-30 seconds Code: DMIR


Infra Red Door Minder - DMIR

Sensing Type	Retro-Reflection IR Photoelectric Beam Sensor
Sensing Range	0-6 metres (22 feet)
Input Voltage	DC 9-15V
Consumption Current	75mA
Standby Current	25 mA max.
Light Source	IR LED
Ambient Temperature	-20°C ~ 50°C
Response time of Speaker	Chime: 1 sec. Alarm: 30 sec.
Volume of Speaker	0-Max. (Adjustable)
Alarm Time	30 sec Max. (Adjustable)
External Chime Output	NPN Output
Speaker Output	Chime / Off / Alarm (Selected by Slide Switch)
Extra Speaker	Optional (DESSPK)
Mounting Bracket & Screw	Included
Accessories	

Doorminder Speaker (additional if required)

Photoelectric Beam Sensor


Connection Diagram:

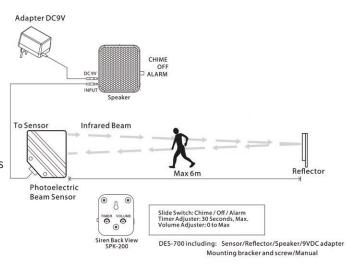



Applications:

Garage door, overhead door, shop & warehouse door entrances.

Dimensions:







FIRS



Reflector

Code: DESSPK



Speaker

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

