

GK-STD SERIES

Metal IP68 Standard Long Thread Gland for Unscreened Cables (less Locknut)



APPLICATIONS:

Glanding For watertight glanding of unscreened circular cables.

PRODUCT FEATURES:

- ▶ Halogen free
- ▶ Silicone free
- ▶ Phosphorous free
- ▶ Cadmium free
- ▶ Self extinguishing

CONSTRUCTION:

Material Bright nickel plated extruded brass gland body and compression head (Brass BS EN 50262 1999 / Brass extrusion BS 2874 CZ121 3Pb).

Seal PCP (Neoprene) rubber.


O-Ring PCP (Neoprene) rubber.

Insert Polyamide 6 traction relief clamping insert.

CHARACTERISTICS:

Operating Temperature Range -40°C to 80°C. Up to 100°C for short periods.

Protection Class Water rating IP68. Pressure rating 5 bar.

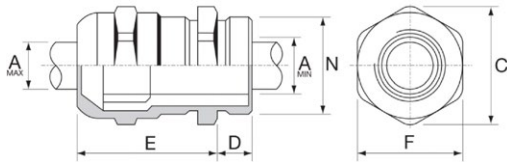

Code	Entry Thread PG	Thread Length (mm) D	Cable Size Min - Max (mm) A	Hexagonal Across Flats (mm) F	Hexagonal Circumference (mm) C	Assembled Length (mm) E
GK16STD	M16 x 1.5	10.0	6.0 – 9.0	17.0	19.0	20.0
GK20STD	M20 x 1.5	10.0	8.0 – 12.0	22.0	24.5	22.0
GK25STD	M25 x 1.5	10.0	11.0 – 17.0	27.0	30.0	24.0
GK32STD	M32 x 1.5	13.0	16.0 – 21.0	34.0	38.0	28.0
GK40STD	M40 x 1.5	13.0	19.0 – 28.0	43.0	48.0	30.0
GK50STD	M50 x 1.5	14.0	26.0 – 35.0	55.0	61.5	32.0
GK63STD	M63 x 1.5	14.0	32.0 – 47.0	68.0	75.4	34.0