

# GLANDS & ACCESSORIES

## GMCW SERIES

**Metal IP66 CW Cable Gland for SWA Armoured Cables C/W Locknut**



### APPLICATIONS:

**Glanding** For glanding of Steel Wire Armoured (SWA) circular cables.

### OPTIONAL ACCESSORIES:

- ▶ PVC shroud
- ▶ Earth tag
- ▶ Adaptors and reducers



### CONSTRUCTION:

**Material** Bright nickel plated extruded brass gland body, armour locking ring and compression head BS2874 (CZ121 Brass).


**Seal** CPE (Neoprene) rubber.

**Insert** CPE (Neoprene) rubber.

### CHARACTERISTICS:

**Operating Temperature Range** -60°C to 150°C.

**Protection Class** IP66.

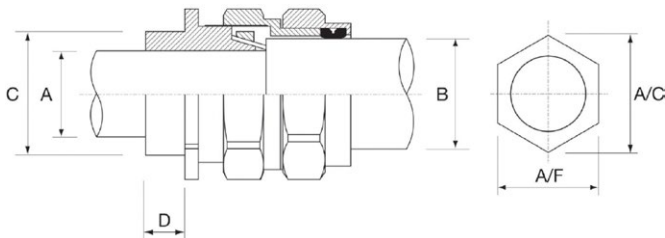

Code	Size	Entry Threads		Cable Bedding Diameter		Cable Overall Diameter		Hexagonal Size		PVC Shroud Code
		Dia. C (mm)	Length D (mm)	A (mm)		B (mm)		A/F (mm)	A/C (mm)	
				Min	Max	Min	Max			
<b>GMCW16</b>	CW-16	16	15	5.00	8.60	8.00	13.20	24.00	27.00	GMSH16/20SS
<b>GMCW20SS</b>	CW-20SS	20	15	5.00	8.60	8.00	13.20	24.00	27.00	GMSH16/20SS
<b>GMCW20S</b>	CW-20S	20	15	8.00	11.80	12.90	17.20	24.00	27.00	GMSH20S
<b>GMCW20</b>	CW-20	20	15	11.00	14.00	15.50	20.80	27.70	31.00	GMSH20
<b>GMCW25S</b>	CW-25S	25	15	12.00	17.00	17.50	24.00	31.50	35.00	GMSH25S
<b>GMCW25</b>	CW-25	25	15	13.00	20.30	20.00	27.20	35.00	39.00	GMSH25
<b>GMCW32</b>	CW-32	32	15	19.00	26.20	26.70	34.00	43.00	47.50	GMSH32
<b>GMCW40</b>	CW-40	40	20	25.00	32.20	33.00	40.50	51.50	57.00	GMSH40
<b>GMCW50S</b>	CW-50S	50	20	31.50	38.20	39.40	46.80	58.50	65.00	GMSH50S
<b>GMCW50</b>	CW-50	50	20	36.50	44.00	45.70	53.20	66.00	73.00	GMSH50
<b>GMCW63S</b>	CW-63S	63	20	42.50	50.00	52.10	59.00	72.00	80.00	GMSH63S
<b>GMCW63</b>	CW-63	63	20	49.10	56.00	58.40	66.00	80.00	89.00	GMSH63
<b>GMCW75S</b>	CW-75S	75	20	54.50	62.00	64.80	72.00	86.50	97.00	GMSH75S
<b>GMCW75</b>	CW-75	75	20	60.50	68.00	71.10	78.00	94.00	105.00	GMSH75
<b>GMCW90</b>	CW-90	90	20	66.00	79.00	77.00	90.00	106.00	118.00	GMSH90