

GPM-SUP/GPG-SUP SERIES

Nylon Gland IP68 C/W Spiral Stress Relief Support (complete with Locknut)



APPLICATIONS:

Glanding For watertight glanding of unscreened circular cables with added protection of a spiral strain relief.

PRODUCT FEATURES:

- ▶ Sealing nut has a locking mechanism to hold cable firmly and to accommodate a wider cable range
- ▶ Long metric thread to aid installation.
- ▶ UL nylon 66 94v-2 halogen free
- ▶ UV stabilised
- ▶ Self extinguishing

CONSTRUCTION:

Material Black or Grey nylon body.

Seal EPDM rubber.


Washer EPDM rubber.

Insert Nylon traction relief clamping insert.

CHARACTERISTICS:

Operating Temperature Range -40°C to 100°C. Up to 120°C for short periods.

Protection Class Water rating IP68. Pressure rating 5 bar.

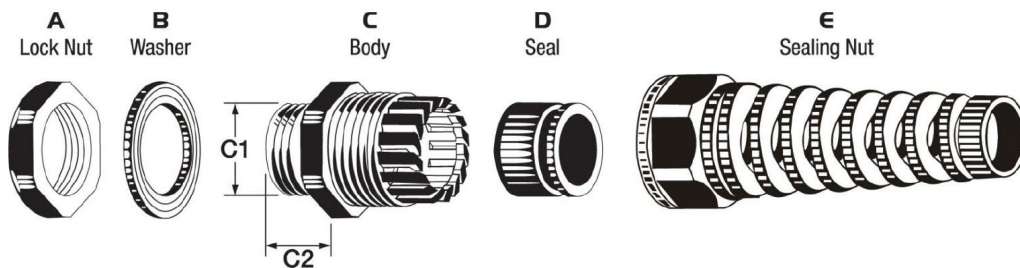

Available in Black or Grey

| Code | Entry Thread (mm) C1 | Thread Length (mm) C2 | Cable Size Min - Max (mm) | Spanner Size A/E (mm) |
|-------------------|----------------------------|-----------------------------|------------------------------|--------------------------|
| GPM12SUP | M12 x 1.5 | 15.0 | 3.0 - 7.0 | 18/19 |
| GPM16SUP | M16 x 1.5 | 15.0 | 4.0 - 10.0 | 22/22 |
| GPM20SUP | M20 x 1.5 | 15.0 | 5.0 - 13.5 | 27/27 |
| GPM25SUP | M25 x 1.5 | 15.0 | 10.0 - 18.0 | 33/33 |
| GPG11SUP | 18.60 | 10.0 | 4.0 - 10.0 | 24/22 |
| GPG13.5SUP | 20.40 | 10.0 | 5.0 - 12.5 | 27/24 |
| GPG16SUP | 22.50 | 11.0 | 6.0 - 14.0 | 30/27 |
| GPG21SUP | 28.30 | 12.0 | 10.0 - 17.5 | 36/33 |