DOOR SWITCHES & DOOR MINDERS

Infrared Door Minder

Plug & Play - Door Entry Alert System with **Reflector Beam**

- Easy to install with adjustable timer and volume
- Plug in power supply 230V
- Retro-reflection type
- Makes "ding-dong" sound or siren when beam is interrupted
- Speaker volume can be adjusted or turned off
- > Pack includes: sensor, reflector, alarm speaker, 9VDC adaptor mounting bracket & screw, installation manual
- ▶ When in siren mode, sounding time is adjustable from 3-30 seconds Code: DMIR


Infra Red Door Minder - DMIR

Sensing Type	Retro-Reflection IR Photoelectric Beam Sensor
Sensing Range	0-6 metres (22 feet)
Input Voltage	DC 9-15V
Consumption Current	75mA
Standby Current	25 mA max.
Light Source	IR LED
Ambient Temperature	-20°C ~ 50°C
Response time of Speaker	Chime: 1 sec. Alarm: 30 sec.
Volume of Speaker	0-Max. (Adjustable)
Alarm Time	30 sec Max. (Adjustable)
External Chime Output	NPN Output
Speaker Output	Chime / Off / Alarm (Selected by Slide Switch)
Extra Speaker	Optional (DESSPK)
Mounting Bracket & Screw	Included
Accessories	

Doorminder Speaker (additional if required)

Photoelectric Beam Sensor


Connection Diagram:

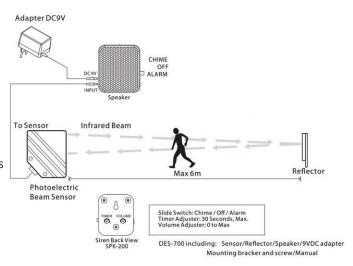



Applications:

Garage door, overhead door, shop & warehouse door entrances.

Dimensions:







FIRS



Reflector

Code: DESSPK



Speaker

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

