



DATA, AUDIO & COMMUNICATION CABLES

FT81 Series	118
FT95-CS Series	119
FT20-CS Series	120
FT20-ESCS Series	121
HCT Series	122
HCTCY Series	123
HCSF Series	124
HCSY Series	125
HCM/HCMHF Series	126
HCY Series	127
HCG3 Series	128
HCE3 Series	129
HCG1 Series	130



FT81 SERIES

High Performance BMS/Control
Overall Foil Screened Tinned Cable
110VAC 90°C



APPLICATIONS:

BMS Used for building management systems and cabling for HVAC controls.

Audio Oxygen free copper for audio applications, PA systems and security gate intercoms.

PRODUCT FEATURES:

- ▶ Fine stranded tinned copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant *(See Technical Section)*

CONSTRUCTION:

Conductor Annealed tinned copper stranded (Class 2).

Insulation PE Polyethylene.

Screening Collective shield of aluminium/polyester foil complete with tinned copper drain wire.

Sheath SPVC 5V-90.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110V RMS.

Minimum Bending Radius Fixed 7.5 x cable diameter.

Sheath Colour Black.

Standard Core Colour

1 Pair - Black & Natural.

1 Triple - Black, Red & Natural.

Relevant Standards AS/NZS 3808, AS/NZS 3008, IEC 60332-1-2, **RoHS** Compliant.

Electrical Characteristics


Property	Value	Unit
DC Conductor Resistance @ 20°C	2.57	Ω/100m
Capacitance between wires of a pair/triple	79	pF/m
Minimum Insulation Resistance @ 20°C	500	M Ω/100m

Code	No. of Cores x Size (mm ²)	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
FT8101CSBMS	1 pair 0.81	16/0.25	5.6	46
FT8103CSBMS	1 triple 0.81	16/0.25	6.4	65

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

FT95-CS SERIES

High Performance Multipair Overall Foil Screened Tinned Data Cable
110VAC 90°C

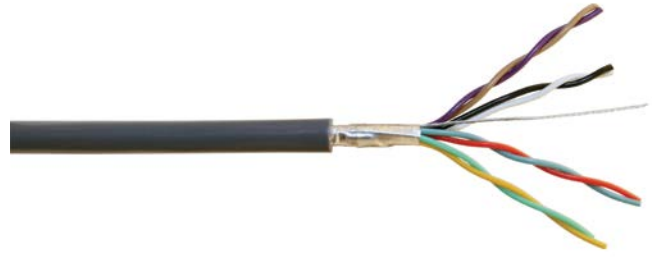

APPLICATIONS:

BUS Systems High performance, extra low capacitance cable suitable for RS232 building and home BUS automation systems.

Data Suitable for connecting data terminal and data communication equipment.

Signal and Controls Power control or signal/instrumentation cables on machines, conveying equipment or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Extremely pliable PVC sheath
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed tinned copper stranded (Class 2).

Insulation Special SPVC V-90 (available in LSHF on request).

Screening Collective shield of aluminium/polyester foil complete with tinned copper drain wire.

Sheath Special SPVC V-90 (available in LSHF on request).

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 90°C.

Maximum Conductor Temperature 90°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius 10 x cable diameter.

Sheath Colour Grey.

Standard Core Colours Each pair (See Technical Section)

Relevant Standards AS/NZS 3808, IEC 60332-1-2,

RoHS Compliant.


Electrical Characteristics			
Property		Value	Unit
DC Conductor Resistance	@ 20°C	89	Ω/km
Capacitance between wires of a pair		95	pF/m
Cross-talk attenuation Between Pairs	@ 1kHz	>70	dB/100m
	@ 100kHz	>45	dB/100m
Characteristic Impedance	@ 1kHz	95	Ω
Attenuation of a Pair	@ 1kHz	0.20	dB/100m
	@ 10kHz	0.60	dB/100m
	@ 100kHz	1.20	dB/100m
	@ 150kHz	1.50	dB/100m
	@ 1.0MHz	4.40	dB/100m
	@ 1.5MHz	5.40	dB/100m

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm ²)	Approx. Weight (Kg/Km)
FT9501CS	1 pair 0.22	24	7/0.20	4.0	22.4
FT9502CS	2 pair 0.22	24	7/0.20	5.1	32.0
FT9503CS	3 pair 0.22	24	7/0.20	5.8	41.9
FT9504CS	4 pair 0.22	24	7/0.20	6.4	51.1
FT9506CS	6 pair 0.22	24	7/0.20	7.6	71.4
FT9509CS	9 pair 0.22	24	7/0.20	8.8	95.9
FT9512CS	12 pair 0.22	24	7/0.20	10.0	124.0
FT9518CS	18 pair 0.22	24	7/0.20	12.0	180.4
FT9525CS	25 pair 0.22	24	7/0.20	13.8	237.9

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

FT20-CS SERIES

High Performance Multipair
Overall Foil Screened Tinned Data
Cable 110V 90°C

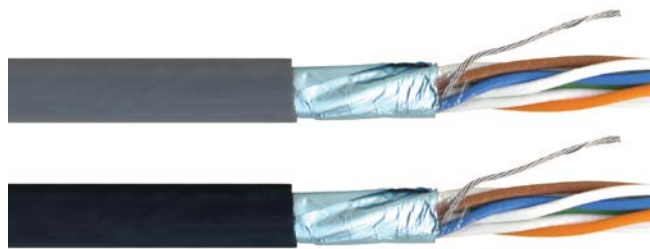

APPLICATIONS:

BUS Systems High performance, extra low capacitance cable suitable for RS232, RS422 POS, building and home BUS automation systems.

Data Suitable for connecting data terminal and data communication equipment.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) E.L.V power control or signal/instrumentation cables on machines, conveying equipment or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Extremely pliable PVC sheath
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Extra low capacitance polyethylene insulation for extended pair operation
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed tinned copper stranded (Class 2).

Insulation Polypropylene (available in LSHF on request).

Screening Collective shield of aluminium/polyester foil complete with tinned copper drain wire.

Sheath Special SPVC V-90 (available in LSHF on request).

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 90°C.

Maximum Conductor Temperature 90°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius 10 x cable diameter.

Sheath Colour Grey, Black.

Standard Core Colours Each pair – (See Technical Section).

Relevant Standards AS/NZS 3808, **RoHS** Compliant.

Electrical Characteristics			
Property		Value	Unit
DC Conductor resistance	@ 20°C	89	Ω/km
Capacitance between wires of a pair		50	pF/m
Cross-talk attenuation between pairs	@ 1kHz	>90	dB/100m
	@ 100kHz	>50	dB/100m
Characteristic Impedance	@ 1kHz	135	Ω
Attenuation of a pair	@ 1kHz	0.15	dB/100m
	@ 10kHz	0.42	dB/100m
	@ 100kHz	0.80	dB/100m
	@ 150kHz	0.90	dB/100m
	@ 1.0MHz	1.90	dB/100m
	@ 1.5MHz	2.40	dB/100m

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
FT2001CS	1 pair 0.22	24	7/0.20	5.1	22.9
FT2002CS	2 pair 0.22	24	7/0.20	6.5	40.9
FT2003CS	3 pair 0.22	24	7/0.20	6.8	48.4
FT2004CS	4 pair 0.22	24	7/0.20	7.4	57.9
FT2005CS	5 pair 0.22	24	7/0.20	9.2	74.1
FT2006CS	6 pair 0.22	24	7/0.20	9.6	83.5
FT2008CS	8 pair 0.22	24	7/0.20	9.9	99.0
FT2010CS	10 pair 0.22	24	7/0.20	10.1	120.1
FT2012CS	12 pair 0.22	24	7/0.20	10.8	133.9
FT2018CS	18 pair 0.22	24	7/0.20	12.8	179.7
FT2025CS	25 pair 0.22	24	7/0.20	15.1	236.1

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

FT20-ESCS SERIES

High Performance Multipair Overall & Individually Foil Screened Tinned Data Cable 110V 90°C

APPLICATIONS:

BUS Systems High performance, extra low capacitance cable suitable for RS485, RS422 POS, building and home BUS automation systems.

Data Suitable for connecting data terminal and data communication equipment.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) E.L.V power control or signal/instrumentation cables on machines, conveying equipment or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Extremely pliable PVC sheath
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Extra low capacitance polyethylene insulation for extended pair operation
- ▶ Heat, oil and chemical resistant (See Technical Section)


CONSTRUCTION:

Conductor Annealed tinned copper stranded (Class 2).

Insulation Polypropylene (available in LSHF on request).

Screening Collective and individual shield of aluminium/polyester foil complete with tinned copper drain wire.

Sheath Special SPVC V-90 (available in LSHF on request).

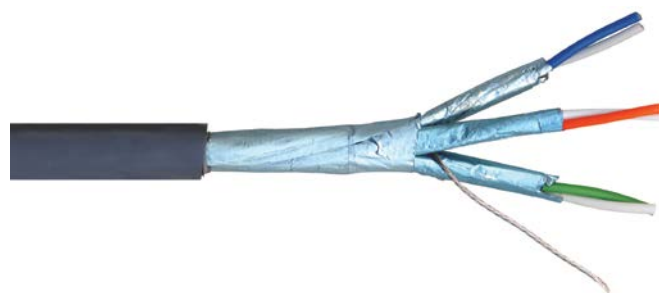

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 90°C.

Maximum Conductor Temperature 90°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius 10 x cable diameter.

Sheath Colour Grey, Black.

Standard Core Colours Each pair – (See Technical Section).

Relevant Standards AS/NZS 3808, **RoHS** Compliant.

Electrical Characteristics			
Property		Value	Unit
DC Conductor Resistance	@ 20°C	89	Ω/km
Capacitance between wires of a pair		68	pF/m
Cross-talk attenuation Between Pairs	@ 1kHz	>100	dB/100m
	@ 100kHz	>80	dB/100m
Characteristic Impedance	@ 1kHz	115	Ω
Attenuation of a Pair	@ 1kHz	0.20	dB/100m
	@ 10kHz	0.50	dB/100m
	@ 100kHz	1.00	dB/100m
	@ 150kHz	1.30	dB/100m
	@ 1.0MHz	3.60	dB/100m
	@ 1.5MHz	4.60	dB/100m

Code	No. of Cores x Size	Nearest AWG	Approx. Stranding	Approx. Overall Diameter	Approx. Weight
	(mm ²)		No. of wires x mm ²		
FT2002ESCS	2 pair 0.22	24	7/0.20	6.7	46.5
FT2003ESCS	3 pair 0.22	24	7/0.20	7.6	56.1
FT2004ESCS	4 pair 0.22	24	7/0.20	8.3	66.8
FT2005ESCS	5 pair 0.22	24	7/0.20	9.8	85.6
FT2006ESCS	6 pair 0.22	24	7/0.20	10.7	97.4
FT2008ESCS	8 pair 0.22	24	7/0.20	10.7	117.2
FT2010ESCS	10 pair 0.22	24	7/0.20	11.4	141.9
FT2012ESCS	12 pair 0.22	24	7/0.20	12.4	159.9
FT2018ESCS	18 pair 0.22	24	7/0.20	15.3	218.5
FT2025ESCS	25 pair 0.22	24	7/0.20	17.4	312.2

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

HCT SERIES

High Performance Flexible
Circular Twin Signal / Audio Cable
110V 75°C



APPLICATIONS:

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) E.L.V power control or signal cables on machines, conveying equipment or similar industrial applications.

Audio Oxygen-free copper for audio applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ High flexibility
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation Special SPVC.

Sheath Special SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C / Flexing -5°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110VRMS/150VDC.

Capacitance Nominal wire to wire pF/M 80.

Minimum Bending Radius Fixed 10 x cable diameter / Flexing 15 x cable diameter.

Sheath Colour Grey.

Standard Core Colours See column below.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Standard Core Colours	Approx. Weight (Kg/Km)	Maximum Resistance ohms/Km 20°C
HCT2027	2 x 0.22	24	7/0.20	3.45	Blue, White	16	87.24
HCT2035	2 x 0.75	18	24/0.20	5.10	Red, Black	60	25.45

HCTCY SERIES

High Performance Flexible Circular
Twin Signal / Audio Cable 110V
75°C



APPLICATIONS:

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) E.L.V power control or signal cables on machines, conveying equipment or similar industrial applications.

Audio Oxygen-free copper for use on microphones and audio controls.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ High flexibility
- ▶ Prevents external interference
- ▶ UV Stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation Special SPVC.

Screening Tinned copper braid of 85% coverage.

Sheath Special SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C / Flexing -5°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110VRMS/150VDC.

Capacitance Nominal wire to wire pF/M 80.

Minimum Bending Radius Fixed 10 x cable diameter / Flexing 15 x cable diameter.

Sheath Colour Grey.

Standard Core Colours See column below.


Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Standard Core Colours	Approx. Weight (Kg/Km)	Maximum Resistance ohms/Km 20°C
HCTCY2127	2 x 0.22	24	7/0.20	3.50	Blue, White	30	85.24
HCTCY2132	2 x 0.50	20	16/0.20	5.10	Red, White	50	38.20
HCTCY2135	2 x 0.75	18	24/0.20	5.70	Red, Black	65	25.45

HCSF SERIES

High Performance Flexible Figure 8 Twin Audio Cable 50V 90°C



APPLICATIONS:

Audio Super flexible oxygen free copper and figure 8 construction for speakers and audio controls.

PRODUCT FEATURES:

- ▶ Very fine stranded copper conductor
- ▶ Extra high flexibility
- ▶ Trace line for easy identification during installation
- ▶ Provides easy separation at each end
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed plain copper stranded extreme flexibility (Class 5 & 6).

Insulation Special SPVC V-75.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 70°C / Flexing -5°C to 70°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 50VRMS/150VDC.

Minimum Bending Radius Fixed 10 x cable height / Flexing 15 x cable height.

Sheath Colour Clear c/w one stripe.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Maximum Resistance ohms/Km 20°C
HCSF3319	2 x 2.0	14	80/0.18	7.0 x 3.5	58	8.45

HCSY SERIES

High Performance Flexible Paired
Figure 8 Twin Foil Screened Data Cable
110V 75°C



APPLICATIONS:

BUS Systems Extra low capacitance cable suitable for building and home BUS automation systems.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) Fixed wiring E.L.V power control or signal cables on machines, conveying equipment or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Very fine stranded copper conductor
- ▶ High flexibility
- ▶ Prevents external interference
- ▶ Provides easy separation at each end
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation Special SPVC.

Screening Individually paired shield of aluminium/polyester foil c/w tinned copper drain wire.

Sheath Special SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C / Flexing -5°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110VRMS/150VDC.

Resistance Maximum 87.24 ohms/Km @ 20°C.

Capacitance Nominal wire to wire pF/M 80.

Minimum Bending Radius Fixed 10 x cable diameter.

Sheath Colour Black.

Standard Core Colours Pair 1 – Red/White. Pair 2 – Black/Yellow.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
HCSY076	2 pair x 0.22	24	7/0.20	3.50 x 7.20	3

HCM/HCMHF SERIES

High Performance Flexible CBS Microphone / Control Cable 110V 75°C



APPLICATIONS:

Audio Oxygen free copper for use on microphones and audio controls. The HCMHF has a super flexible SPVC sheath for long-term durability.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) Fixed wiring E.L.V power control or signal cables on machines, conveying equipment or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ HCM is tinned fine stranded copper conductor
- ▶ HCM is highly flexible
- ▶ HCMHF is very fine stranded plain copper conductor
- ▶ HCMHF is super flexible
- ▶ Prevents external interference
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed tinned copper stranded extreme flexibility (Class 5 & 6).

Insulation Special SPVC.

Screening Overall tinned copper braid screen 90% coverage.

Sheath HCM: Special SPVC.

HCMHF: Highly flexible SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C / Flexing -5°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius Fixed 10 x cable diameter / Flexing 5 x cable diameter.

Sheath Colour HCM: Grey. **HCMHF:** Black.

Standard Core Colours See column below.

Capacitance Nominal wire to wire pF/M 120.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Standard Core Colours	Approx. Weight (Kg/Km)	Maximum Resistance ohms/Km 20°C
HCM							
HCM2129	1 pair x 0.22	24	7/0.20	4.95	Red/Black	45	87.24
HCMHF SPECIAL HI-FLEX SPVC							
HCMHF2522	1 pair x 0.40	21	30/0.12	6.50	Blue/White	80	41.90
HCMHFX130	1 quad x 0.22	24	42/0.08	6.30	2Blue/2White	54	84.20

HCY SERIES

High Performance Flexible Paired Overall Foil and Braid Screened Tinned Data Cable 110V 75°C



APPLICATIONS:

BUS Systems Extra low capacitance cable suitable for RS485, POS and building and home BUS automation systems.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) Fixed wiring E.L.V power control or signal cables on machines, conveying equipment or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Very fine stranded copper conductor
- ▶ High flexibility
- ▶ Prevents external interference
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation Polypropylene 90°C.

Screening Overall aluminium foil screen c/w drain wire plus overall tinned copper braid screen 85% coverage.

Sheath Special SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C.

Maximum Conductor Temperature 90°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius Fixed 10 x cable diameter

Sheath Colour Grey.

Standard Core Colours

1 Pair – Red/Black.

2 Pair – Black/White & Red/Green.

Resistance Maximum 87.24 ohms/km at 20°C.

Capacitance Nominal wire to wire pF/M 40.

Characteristic Impedance 120ohms.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
HCY366	1 pair x 0.22	24	7/0.20	6.1	50
HCY097	2 pair x 0.22	24	7/.020	7.9	96

HCG3 SERIES

High Performance Flexible Overall Foil Screened Cable
110V 75°C



APPLICATIONS:

BUS Systems Extra low capacitance cable suitable for RS232, RS423 and building and home BUS automation systems.

Audio Oxygen free copper for audio controls.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) Fixed wiring E.L.V power control or signal cables on machines, conveying equipment, instrumentation or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ High flexibility
- ▶ Prevents external interference
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation Special SPVC.

Screening Collective shield of aluminium/polyester foil c/w tinned copper drain wire.

Sheath Special SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius Fixed 10 x cable diameter.

Sheath Colour Grey.

Standard Core Colours (*See Technical Section - Core Colours chart A*)

Resistance Maximum 38.20 ohms/Km @ 20°C.

Capacitance Nominal wire to wire pF/M150.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
HCG303	3 x 0.5	20	16/0.20	5.7	54
HCG304	4 x 0.5	20	16/0.20	5.7	57
HCG306	6 x 0.5	20	16/0.20	7.1	78
HCG308	8 x 0.5	20	16/0.20	7.7	110

HCE3 SERIES

High Performance Flexible Overall
Foil Screen Cable
110V 75°C



APPLICATIONS:

BUS Systems Extra low capacitance cable suitable for RS232, RS423 and building and home BUS automation systems.

Audio Oxygen free copper for audio controls.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) Fixed wiring E.L.V power control or signal cables on machines, conveying equipment, instrumentation or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ High flexibility
- ▶ Prevents external interference
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation Special SPVC.

Screening Collective shield of aluminium/polyester foil c/w tinned copper drain wire.

Sheath Special SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius Fixed 10 x cable diameter.

Sheath Colour Grey.

Standard Core Colours (See Technical Section - Core Colours chart A).

Resistance Maximum 87.24ohms @ 20°C.

Capacitance Nominal wire to wire pF/M 80.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
HCE304	4 x 0.22	24	7/0.20	4.8	40
HCE306	6 x 0.22	24	7/0.20	5.5	46
HCE308	8 x 0.22	24	7/0.20	6.1	59
HCE312	12 x 0.22	24	7/0.20	7.5	86

HCGI SERIES

High Performance Flexible CBS
Cable 110V 75°C



APPLICATIONS:

BUS Systems Extra low capacitance cable suitable for RS232, RS423 and building and home BUS automation systems.

Audio Oxygen free copper for audio controls.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) E.L.V power control or signal cables on machines, conveying equipment, instrumentation or similar industrial applications requiring EMC screening.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ High flexibility
- ▶ Prevents external interference
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation Special SPVC.

Screening Tinned copper braid 85% coverage.

Sheath Special SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 75°C / Flexing -5°C to 75°C.

Maximum Conductor Temperature 75°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius Fixed 10 x cable diameter / Flexing 15 x cable diameter.

Sheath Colour Grey.

Standard Core Colours (See Technical Section - Core Colours chart A).

Resistance Maximum 38.200HMS/Km @ 20°C.

Capacitance Nominal wire to wire pF/M 150 / Nominal wire to screen PF/M 290.

Relevant Standards AS/NZS 1125, IEC 60332-1,

RoHS Compliant.

Code	No. of Cores x Size (mm ²)	Nearest AWG	Approx. Stranding No. of wires x mm ²	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
HCG103	3 x 0.5	20	16/0.20	5.2	60
HCG104	4 x 0.5	20	16/0.20	5.8	70
HCG106	6 x 0.5	20	16/0.20	6.9	98
HCG108	8 x 0.5	20	16/0.20	7.2	115