



## MARINE & OFFSHORE CABLES

MLG2 Single Series.....	57
MLG2 Multi Series.....	58
HDT Series.....	60
MSMA Series.....	62
SOU Series.....	65
RFOU Series.....	67
MTR Series.....	69
MST Series.....	70
MBS Series .....	71
MFE Series.....	72
MTS Series.....	73
MTSV Series.....	74
FTM Series.....	75
TW-T Series.....	76








## **ON ALL FIRSTFLEX STOCKED CABLES**

**YES - THAT MEANS FROM 0.22mm<sup>2</sup> TO 500mm<sup>2</sup>**



## ALLFLEX INDUSTRIAL MLG2 SINGLE SERIES

Ultra Performance Flexible Rubber Industrial / Marine Cable 0.6/1kV 90°C AS/NZS 5000.1, IEC 60092-350, H07RN-F

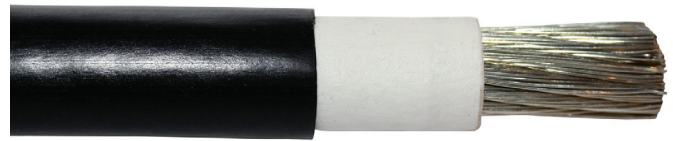

### APPLICATIONS:

**Hazardous Areas** With correct explosion proof glands this cable can be installed in locations subject to explosion hazards rated 0.6/1kV (DIN VDE 0165).

**Waste Water Treatment Plants** Suitable for submersion in polluted liquids and aggressive environments up to 10 metres.

**Lighting & Entertainment** With its extra durable CPE sheath this cable is suitable for outdoor temporary power supplies and lighting leads.

**Marine** Flexible tinned copper & Lloyds approved cable for installation in pleasure craft, super yachts and other marine applications.

**Power** Switchboards, flexible droppers from busbars, transformers and load banks. Also used on construction sites due to its outstanding flexibility, durability and industrial performance.

**Pumping** Suitable for permanent submersion to 500 metres.

### PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Water and moisture resistant
- ▶ Good elongation at break
- ▶ Good Dielectric properties
- ▶ Resistant to environmental factors such as oxidation, ozone and sunlight
- ▶ Very good behaviour to variations of outdoor temperature
- ▶ Suitable for permanent submersion to 500 metres
- ▶ Good tensile strength, tearing strength and abrasion resistance
- ▶ Heat, oil and chemical resistant (See Technical Section)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** EPR R90.

**Sheath** CPE Elastomer Rubber.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -40°C to 90°C / Flexing -25°C to 90°C.

**Maximum Conductor Temperature** 90°C. (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

**Rated Voltage** Uo/U 0.6/1kV.

**Minimum Bending Radius** Fixed 4 x cable diameter / flexing 6 x cable diameter.

**Sheath Colour** Black.

**Insulation Colour** White (Bonded).

**Relevant Standards** DIN VDE 0295, DIN VDE 0165, IEC 60092-353, IEC 60092-359, IEC 60092-351, AS/NZS 1125, AS/NZS 3808,

**RoHS** Compliant.




**AS/NZS 5000.1** Electric cables for working voltage 0.6/1kV.

**IEC 60092-350** Electrical installations in ships - Part 350: General construction and test methods.

**IEC 60332-3-22** Test for vertical flame spread of vertically-mounted bunched wires or cables.

**H07RN-F** Harmonised type heavy duty rubber cable construction.

**Certification Approvals** Lloyds Type Approval CEF/SA.

Code	No. of Cores x Size (mm <sup>2</sup> )	Approx. Overall Diameter +/- 10% (mm)	Approx. Weight (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed installation 3 Phase			3 Phase Volt Drop @50Hz / MAX. Conductor Temp  90°C (Mv/Am)
				Spaced 	Spaced from Surface 	Touching 	
<b>COMPLIES TO AS/NZS 5000.1, IEC 60092-350 &amp; H07RN-F TYPE</b>							
<b>ML1/10G2</b>	1 x 10.0	10.6	158	88	76	70	4.050
<b>ML1/16G2</b>	1 x 16.0	11.8	225	117	100	94	2.550
<b>ML1/25G2</b>	1 x 25.0	13.8	318	156	133	125	1.620
<b>ML1/35G2</b>	1 x 35.0	15.2	415	195	166	155	1.170
<b>ML1/50G2</b>	1 x 50.0	17.8	560	245	210	196	0.872
<b>ML1/70G2</b>	1 x 70.0	20.1	788	311	265	248	0.615
<b>ML1/95G2</b>	1 x 95.0	22.5	980	375	319	298	0.457
<b>ML1/120G2</b>	1 x 120.0	24.4	1280	447	381	354	0.373

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

## ALLFLEX INDUSTRIAL MLG2 MULTI SERIES

Ultra Performance Flexible Rubber  
Industrial / Marine Cable 0.6/1kV 90°C  
AS/NZS 5000.1, IEC 60092, H07RN-F

### APPLICATIONS:

**Hazardous Areas** With correct explosion proof glands this cable can be installed in locations subject to explosion hazards rated 0.6/1kV (DIN VDE 0165).

**Waste Water Treatment Plants** Suitable for submersion in polluted liquids and aggressive environments up to 10 metres.

**Lighting & Entertainment** With its extra durable CPE sheath this cable is suitable for outdoor temporary power supplies and lighting leads.

**Marine** Flexible tinned copper & Lloyds approved cable for installation in pleasure craft, super yachts and other marine applications.


**Power** Used on construction sites due to its outstanding flexibility, durability and industrial performance.

**Pumping** Suitable for permanent submersion to 500 metres.

### PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Water and moisture resistant
- ▶ Good elongation at break
- ▶ Good Dielectric properties
- ▶ Resistant to environmental factors such as oxidation, ozone and sunlight
- ▶ Very good behaviour to variations of outdoor temperature
- ▶ Suitable for permanent submersion to 500 metres
- ▶ Good tensile strength, tearing strength and abrasion resistance
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

See over for full product table ▶

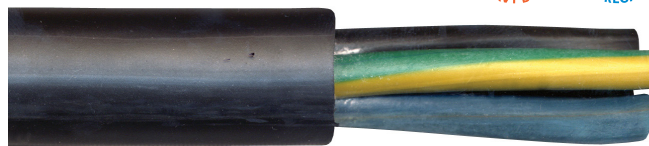

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** EPR R90.

**Sheath** CPE Elastomer Rubber.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -40°C to 90°C / Flexing -25°C to 90°C.

**Maximum Conductor Temperature** 90°C.

**Rated Voltage** U<sub>o</sub>/U 0.6/1kV.

**Minimum Bending Radius** Fixed 4 x cable diameter / flexing 6 x cable diameter.

**Sheath Colour** Black.

**Standard Core Colours**

**MLCON-G2**

3 to 19 Core - Black Numbered + Green/Yellow

**ML-G2**

2 Core - Blue, Brown

3 Core - Blue, Brown, Green/Yellow

4 Core - Brown, Black, Grey, Green/Yellow

5 Core - Blue, Brown, Black, Grey, Green/Yellow

Multi Core - Black Numbered + Green/Yellow

**Relevant Standards** DIN VDE 0295, DIN VDE 0165, IEC 60092-360, IEC 60092-353, IEC 60092-359, IEC 60092-351, AS/NZS 1125, AS/NZS 3808, **RoHS** Compliant.

**AS/NZS 5000.1** Electric cables for working voltage 0.6/1kV.

**IEC 60092-360** Electrical installations in ships - Part 360: Insulating and sheathing materials for shipboard and offshore units, power, control, instrumentation and telecommunication cables.


**IEC 60092-350** Electrical installations in ships - Part 350: General construction and test methods.

**IEC 60332-3-22** Test for vertical flame spread of vertically-mounted bunched wires or cables.

**H07RN-F** Harmonised type heavy duty rubber cable construction (1.5mm<sup>2</sup> and above).

**Certification Approvals** Lloyds Type Approval CEF/SA.

## ALLFLEX INDUSTRIAL MLG2 MULTI SERIES continued

Code	No. of Cores x Size  (mm <sup>2</sup> )	Approx. Stranding  No. of wires x mm	Approx. Overall Diameter +/- 10%  (mm)	Approx. Weight  (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application		3 Phase Volt Drop @50Hz / MAX. Conductor Temp:  90°C (Mv/Am)
					Touching		
<b>COMPLIES ONLY TO IEC 60092-350. CORE COLOURS: BLACK NUMBERED + GRN/YEL</b>							
MLCON03/1.0BKG2	3 x 1.0	32 x 0.20	10.1	128	18		46.800
MLCON04/1.0BKG2	4 x 1.0	32 x 0.20	11.0	160	16		46.800
MLCON05/1.0BKG2	5 x 1.0	32 x 0.20	12.1	172	14		46.800
MLCON07/1.0BKG2	7 x 1.0	32 x 0.20	12.8	191	12		46.800
MLCON12/1.0BKG2	12 x 1.0	32 x 0.20	16.9	287	12		46.800
MLCON19/1.0BKG2	19 x 1.0	32 x 0.20	20.2	432	12		46.800
<b>COMPLIES TO AS/NZS 5000.1, IEC 60092-350 &amp; H07RN-F TYPE</b>							
ML02/1.5BKG2	2 x 1.5	30/0.25	10.8	130	25		30.000
ML02/2.5BKG2	2 x 2.5	50/0.25	11.8	190	33		16.400
ML02/4.0BKG2	2 x 4.0	56/0.30	13.2	260	44		10.200
ML02/6.0BKG2	2 x 6.0	84/0.30	15.0	350	56		6.800
ML02/10.0BKG2	2 x 10.0	80/0.40	20.1	538	67		4.050
ML02/16.0BKG2	2 x 16.0	128/0.40	22.9	749	89		2.550
ML03/1.5BKG2	3 x 1.5	30/0.25	11.6	160	21		30.000
ML03/2.5BKG2	3 x 2.5	50/0.25	12.7	230	29		16.400
ML03/4.0BKG2	3 x 4.0	56/0.30	14.2	320	37		10.200
ML03/6.0BKG2	3 x 6.0	84/0.30	16.1	425	47		6.800
ML03/10.0BKG2	3 x 10.0	80/0.40	21.5	765	67		4.050
ML03/16.0BKG2	3 x 16.0	128/0.40	24.0	1060	89		2.550
ML04/1.5BKG2	4 x 1.5	30/0.25	12.8	200	21		30.000
ML04/2.5BKG2	4 x 2.5	50/0.25	13.9	290	29		16.400
ML04/4.0BKG2	4 x 4.0	56/0.30	15.6	400	37		10.200
ML04/6.0BKG2	4 x 6.0	84/0.30	17.9	540	47		6.800
ML04/10.0BKG2	4 x 10.0	80/0.40	23.0	930	67		4.050
ML04/16.0BKG2	4 x 16.0	128/0.40	26.0	1300	89		2.550
ML04/25.0BKG2	4 x 25.0	200/0.40	32.0	1950	119		1.610
ML04/35.0BKG2	4 x 35.0	280/0.40	35.0	2330	149		1.170
ML04/50.0BKG2	4 x 50.0	400/0.40	40.0	3200	187		0.868
ML05/1.5BKG2	5 x 1.5	30/0.25	14.0	240	21		30.000
ML05/2.5BKG2	5 x 2.5	50/0.25	15.3	350	29		16.400
ML05/4.0BKG2	5 x 4.0	56/0.30	17.3	500	37		10.200
ML05/6.0BKG2	5 x 6.0	84/0.30	19.8	670	47		6.800
ML05/10.0BKG2	5 x 10.0	80/0.40	25.8	1140	67		4.050
ML05/16.0BKG2	5 x 16.0	128/0.40	29.0	1610	89		2.550
ML05/25.0BKG2	5 x 25.0	200/0.40	35.0	2440	119		1.610
ML05/35.0BKG2	5 x 35.0	280/0.40	38.0	3310	149		1.170
ML07/1.5BKG2	7 x 1.5	30/0.25	15.3	330	15		30.000
ML07/2.5BKG2	7 x 2.5	50/0.25	17.0	470	20		16.400
ML12/1.5BKG2	12 x 1.5	30/0.25	20.8	480	15		30.000
ML12/2.5BKG2	12 x 2.5	50/0.25	22.9	690	20		16.400
ML19/1.5BKG2	19 x 1.5	30/0.25	24.7	710	15		30.000

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.



## CHEMTUFF TWINSKIN HDT SERIES

Ultra Performance Flexible Cable  
Double Sheath 0.6/1kV 90°C



### APPLICATIONS:

**Chemtuff** Used in applications that require a greater resistance to chemicals, solvents, oils and fats.

**Marine** Flexible tinned copper for installations on pleasure craft, ship to shore and other marine applications.

**Extension Leads** Used on construction sites due to its outstanding flexibility and cable memory. Suitable for tough climatic and mechanical conditions.

**Power** With a separator acting as a second sheath this cable provides extra safety for machine tools, construction and engineering equipment and conveyers.

**Pumping** Suitable for permanent submersion to 200 metres.

**Lighting & Entertainment** With its extra durable SER sheath and high visibility, this cable is suitable for outdoor temporary power supply and lighting leads.

### PRODUCT FEATURES:

- ▶ Yellow sheath for high visibility
- ▶ Tinned fine stranded copper conductor
- ▶ Non-marking sheath suits ship to shore use
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Extremely flexible
- ▶ Water and moisture resistant
- ▶ Suitable for permanent submersion to 200 metres
- ▶ Heat, oil and chemical resistant (See *Technical Section*)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded extreme flexibility (Class 5 & 6).

**Insulation** X-90.

**Separator** An added separator or bedding of extruded V-90HT material for safety and durability. Silicate powder lubricant between cores and inner sheath to reduce friction.

**Sheath** SER105.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -40°C to 90°C / Flexing -20°C to 90°C.

**Maximum Conductor Temperature** 90°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

**Rated Voltage** U<sub>o</sub>/U 0.6/1kV.

**Max AC Operating Voltage** U<sub>o</sub> 0.7kV.

**Minimum Bending Radius** Fixed 5 x cable diameter / Flexing 6 x cable diameter.

**Sheath Colour** Yellow

#### Standard Core Colour

3 Core – Blue, Brown, Green/Yellow.


4 Core – Grey, Brown, Black, Green/Yellow.

5 Core – Blue, Red, White, Black, Green/Yellow.

**Relevant Standards** AS/NZS 3191, AS/NZS 5000.1, AS/NZS 3308, IEC 60227, IEC 60332-1, **RoHS** Compliant.

See over for full product table ▶


## CHEMTUFF TWINSKIN HDT SERIES continued

Code	No. of Cores x Size	Approx. Stranding	Approx. Overall Diameter	Approx. Weight	Nominal Amps un-enclosed protected from sun @ 30°C fixed application	3 Phase Volt Drop @50Hz / MAX. Conductor Temp:
	(mm <sup>2</sup> )	No. of wires x mm	(mm)	(Kg/Km)	Touching 	90°C (Mv/Am)
<b>HD03/1.5T</b>	3 x 1.5	48/0.20	10.5	140	21	30.000
<b>HD03/2.5T</b>	3 x 2.5	80/0.20	12.4	194	29	16.400
<b>HD03/4.0T</b>	3 x 4.0	127/0.20	14.4	319	37	10.200
<b>HD03/6.0T</b>	3 x 6.0	190/0.20	15.9	406	47	6.800
<b>HD04/1.5T</b>	4 x 1.5	48/0.20	11.6	170	21	30.000
<b>HD04/2.5T</b>	4 x 2.5	80/0.20	14.0	239	29	16.400
<b>HD04/4.0T</b>	4 x 4.0	127/0.20	16.0	394	37	10.200
<b>HD04/6.0T</b>	4 x 6.0	190/0.20	19.0	505	47	6.800
<b>HD05/1.5T</b>	5 x 1.5	48/0.20	13.0	210	21	30.000
<b>HD05/2.5T</b>	5 x 2.5	80/0.20	15.4	289	29	16.400
<b>HD05/4.0T</b>	5 x 4.0	127/0.20	17.4	482	37	10.200
<b>HD05/6.0T</b>	5 x 6.0	190/0.20	21.0	619	47	6.800
<b>HD05/10T</b>	5 x 10.0	318/0.20	28.1	1190	67	4.050
<b>HD05/16T</b>	5 x 16.0	504/0.20	31.7	1590	89	2.550
<b>HD05/35T</b>	5 x 35.0	1120/0.20	36.6	3210	149	1.170



## MSMA SERIES

Standard Performance Fixed LSHF  
CBS Shipboard / Offshore Power  
Cable 0.6/1kV 90°C

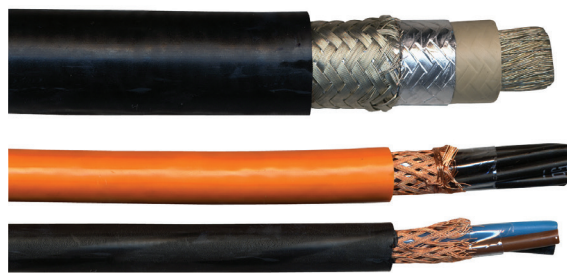

### APPLICATIONS:

**Marine** For fixed wiring installations on oil and gas rigs, shipboard and other marine applications requiring screened cable for EMC.  
**Rail or Rolling Stock** Suitable for wiring in locomotives, rail cars, buses and coaches.

### PRODUCT FEATURES:

- ▶ Low smoke halogen free
- ▶ PVC free
- ▶ Lloyds approved
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ To be earthed at both ends using EMC compatible glands
- ▶ Heat, oil and chemical resistant (*See Technical Section*)




### CONSTRUCTION:

**Conductor** Annealed plain copper stranded (Class 2).  
**Insulation** XLPE halogen free X90.  
**Inner Covering** (If any) Halogen free compound (IEC 60092-353).  
**Screening** Tinned or plain copper braid.  
**Sheath** Polyolefine compound SHF (IEC 60092-353 & 3.7.3A).

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -15°C to 90°C.  
**Maximum Conductor temperature** 90°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).  
**Rated Voltage** U<sub>o</sub>/U 0.6/1kV **Max AC Operating Voltage** U<sub>o</sub> 0.7kV.  
**Minimum Bending Radius** Up to 25mm<sup>2</sup> 4 x cable diameter / Over 25mm<sup>2</sup> 6 x cable diameter.  
**Sheath Colour** Orange or Black.  
**Standard Core Colours**  
*Without Earth Conductor:*  
2 Core – Blue, Brown.  
3 Core – Grey, Black, Brown.  
4 Core – Blue, Black, Grey, Brown.  
Multi Core – Black Numbered.  
**Certification Society Approvals** Lloyds, Type CJPJ85 or HFX-A/CU, ABS type YOZp, BV type YOZp, DNV.GL type YOZp other approvals available on request.  
**Relevant Standards** IEC 61034, IEC 60754, IEC 60332-3-22, IEC 60092-350/351/352/353/359, IEC 60754-1/2, IEC 61034-1/2, IEC 60332-1, **CE** Directive 2006/95/EC, **RoHS** Compliant.

### SINGLE CORE

Code	No. of Cores x Size  (mm <sup>2</sup> )	Approx. Stranding  No. of wires x mm	Approx. Overall Diameter  (mm)	Approx. Weight  (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed installation 3 phase			3 Phase Volt Drop @ 50Hz / MAX. conductor temp:  90°C (Mv/Am)
					Spaced 	Spaced from Surface 	Touching 	
<b>MSMA1/10</b>	1 x 10.0	7/1.35	9.2	170	88	76	94	4.050
<b>MSMA1/16</b>	1 x 16.0	7/1.70	10.2	235	117	100	125	2.550
<b>MSMA1/25</b>	1 x 25.0	7/2.13	12.0	350	156	133	155	1.620
<b>MSMA1/35</b>	1 x 35.0	7/2.52	12.8	440	195	166	196	1.170
<b>MSMA1/50</b>	1 x 50.0	19/1.83	16.0	660	245	210	248	0.872
<b>MSMA1/70</b>	1 x 70.0	19/2.17	18.0	890	311	265	298	0.615




Product table continued over ▶

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.





## MSMA SERIES continued

### SINGLE CORE

Code	No. of Cores x Size  (mm <sup>2</sup> )	Approx. Stranding  No. of wires x mm	Approx. Overall Diameter  (mm)	Approx. Weight  (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed installation 3 phase			3 Phase Volt Drop @ 50Hz / MAX. conductor temp:  90°C (Mv/Am)
					Spaced 	Spaced from Surface 	Touching 	
<b>MSMA1/95</b>	1 x 95.0	19/2.52	20.0	1180	375	319	354	0.457
<b>MSMA1/120</b>	1 x 120.0	37/2.03	21.5	1440	447	381	409	0.373
<b>MSMA1/150</b>	1 x 150.0	37/2.27	24.0	1760	517	440	409	0.316
<b>MSMA1/185</b>	1 x 185.0	37/2.52	26.0	2140	594	505	470	0.269
<b>MSMA1/240</b>	1 x 240.0	61/2.24	29.0	2760	716	608	565	0.227

### MULTI CORE


Code	No. of Cores x Size  (mm <sup>2</sup> )	Approx. Stranding  No. of wires x mm	Approx. Overall Diameter  (mm)	Approx. Weight  (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application		3 Phase Volt Drop @ 50Hz / MAX. conductor temp:  90°C (Mv/Am)
					Touching 		
<b>MSMA2/1.5</b>	2 x 1.5	7/0.52	10.2	120	25		30.000
<b>MSMA2/2.5</b>	2 x 2.5	7/0.67	11.1	150	33		16.400
<b>MSMA2/4.0</b>	2 x 4.0	7/0.85	12.3	195	44		10.200
<b>MSMA2/10</b>	2 x 10.0	7/1.35	16.0	425	79		4.050
<b>MSMA2/16</b>	2 x 16.0	7/1.70	18.5	590	106		2.550
<b>MSMA2/25</b>	2 x 25.0	7/2.13	22.1	860	141		1.610
<b>MSMA3/1.5</b>	3 x 1.5	7/0.52	10.4	145	25		30.000
<b>MSMA3/2.5</b>	3 x 2.5	7/0.67	11.0	185	33		16.400
<b>MSMA3/4.0</b>	3 x 4.0	7/0.85	12.4	243	44		10.200
<b>MSMA3/6.0</b>	3 x 6.0	7/1.05	13.6	340	56		6.800
<b>MSMA3/10</b>	3 x 10.0	7/1.35	16.0	520	79		4.050
<b>MSMA3/16</b>	3 x 16.0	7/1.70	19.0	750	106		2.550
<b>MSMA3/25</b>	3 x 25.0	7/2.13	22.5	1120	141		1.610
<b>MSMA3/35</b>	3 x 35.0	7/2.52	26.5	1660	149		1.170
<b>MSMA3/50</b>	3 x 50.0	19/1.83	29.0	2100	187		0.868
<b>MSMA3/70</b>	3 x 70.0	19/2.17	34.0	2950	235		0.609
<b>MSMA3/95</b>	3 x 95.0	19/2.52	39.0	4010	282		0.450
<b>MSMA3/120</b>	3 x 120.0	37/2.03	42.0	4990	333		0.366
<b>MSMA4/1.5</b>	4 x 1.5	7/0.52	10.8	180	21		30.000
<b>MSMA4/2.5</b>	4 x 2.5	7/0.67	12.2	225	29		16.400
<b>MSMA4/4.0</b>	4 x 4.0	7/0.85	13.4	305	37		10.200
<b>MSMA4/6.0</b>	4 x 6.0	7/1.05	15.5	410	47		6.800
<b>MSMA4/10</b>	4 x 10.0	7/1.35	18.0	635	67		4.050
<b>MSMA4/25</b>	4 x 25.0	7/2.13	25.0	1360	119		1.610

Product table continued over ►

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

## MSMA SERIES continued

### MULTI CORE

Code	No. of Cores x Size  (mm <sup>2</sup> )	Approx. Stranding  No. of wires x mm	Approx. Overall Diameter  (mm)	Approx. Weight  (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application	3 Phase Volt Drop @ 50Hz / MAX. conductor temp:
					Touching 	90°C (Mv/Am)
<b>MSMA4/35</b>	4 x 35.0	7/2.52	29.0	2070	149	1.170
<b>MSMA4/50</b>	4 x 50.0	19/1.83	32.0	2640	187	0.868
<b>MSMA4/70</b>	4 x 70.0	19/2.17	37.5	3700	235	0.609
<b>MSMA4/95</b>	4 x 95.0	19/2.52	42.5	5070	282	0.450
<b>MSMA4/120</b>	4 x 120.0	37/2.03	46.5	6300	333	0.366
<b>MSMA5/1.5</b>	5 x 1.5	7/0.52	12.0	200	21	30.000
<b>MSMA5/2.5</b>	5 x 2.5	7/0.67	12.6	242	29	16.400
<b>MSMA5/4.0</b>	5 x 4.0	7/0.85	16.2	346	37	10.200
<b>MSMA5/6.0</b>	5 x 6.0	7/1.05	18.1	479	47	6.800
<b>MSMA5/10</b>	5 x 10.0	7/1.35	20.3	737	67	4.050
<b>MSMA5/16</b>	5 x 16.0	7/1.70	24.5	1156	89	2.550
<b>MSMA5/25</b>	5 x 25.0	7/2.13	29.2	1781	119	1.610
<b>MSMA5/35</b>	5 x 35.0	7.252	33.4	2537	149	1.170
<b>MSMA7/1.5</b>	7 x 1.5	7/0.52	12.8	245	15	30.000
<b>MSMA10/1.5</b>	10 x 1.5	7/0.52	16.5	380	15	30.000
<b>MSMA12/1.5</b>	12 x 1.5	7/0.52	17.5	435	15	30.000
<b>MSMA14/1.5</b>	14 x 1.5	7/0.52	18.5	485	15	30.000
<b>MSMA16/1.5</b>	16 x 1.5	7/0.52	19.0	530	15	30.000
<b>MSMA19/1.5</b>	19 x 1.5	7/0.52	20.0	610	15	30.000
<b>MSMA24/1.5</b>	24 x 1.5	7/0.52	23.5	760	15	30.000
<b>MSMA27/1.5</b>	27 x 1.5	7/0.52	24.0	830	15	30.000
<b>MSMA30/1.5</b>	30 x 1.5	7/0.52	24.5	900	15	30.000
<b>MSMA37/1.5</b>	37 x 1.5	7/0.52	26.5	1060	15	30.000



## SOU SERIES

Standard Performance Fixed LSHF  
CBS Shipboard / Offshore Data  
Cable 250V 90°C



### APPLICATIONS:

**Marine** For fixed wiring installations on oil and gas rigs, shipboard and other marine applications requiring screened cable for EMC.

**Rail or Rolling Stock** Suitable for wiring in locomotives, rail cars, buses and coaches.

**Small Spaces** Lightweight and small-diameter solution compared to braided cables.

### PRODUCT FEATURES:

- ▶ Low smoke halogen free
- ▶ PVC free
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

See over for full product table ▶

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded (Class 2).

**Insulation** HF-XLPE X90.

**Laying Up** Cores in twisted pairs, triples or quads.

**Screening** Collective shield of aluminium/polyester tape c/w tinned copper stranded drain wire and synthetic tape.

**Sheath** SHF1 low smoke halogen free.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -15°C to 75°C.

**Maximum Conductor temperature** 90°C.

**Rated Voltage** 250V (RMS) radial thickness sheath (not suitable for mains connection).

**Minimum Bending Radius** Fixed 8 x cable diameter.

**Sheath Colour** Grey.

**Standard Core Colours** Numbered Black and Blue pairs.

**Certification Society Approvals** Lloyds, Type CHJJP or HFX-OSU-T, YZafc, ABS, BV, DNV.GL type YOZp.

**Relevant Standards** IEC 60228 CL.2,  
IEC 60092-376/350/351/352/353/359, IEC 60332-1,  
IEC 60332-3-22, IEC 60754-1/2, IEC 610034-1/2,  
CE Directive 2006/95/EC, **RoHS** Compliant.



## SOU SERIES continued

Code	No. of Cores x Size	Approx. Stranding	Approx. Overall Diameter	Approx. Weight
	(mm <sup>2</sup> )	No. of wires x mm	(mm)	(Kg/Km)
<b>SOU01/2/0.5</b>	1 PAIR 0.5	7/0.30	6.1	60
<b>SOU02/2/0.5</b>	2 PAIR 0.5	7/0.30	8.9	100
<b>SOU04/2/0.5</b>	4 PAIR 0.5	7/0.30	10.2	130
<b>SOU07/2/0.5</b>	7 PAIR 0.5	7/0.30	12.3	195
<b>SOU10/2/0.5</b>	10 PAIR 0.5	7/0.30	15.0	265
<b>SOU14/2/0.5</b>	14 PAIR 0.5	7/0.30	16.9	350
<b>SOU19/2/0.5</b>	19 PAIR 0.5	7/0.30	19.2	450
<b>SOU24/2/0.5</b>	24 PAIR 0.5	7/0.30	21.4	560
<b>SOU30/2/0.5</b>	30 PAIR 0.5	7/0.30	23.7	660
<b>SOU01/4/0.5</b>	1 QUAD 0.5	7/0.30	7.1	80
<b>SOU01/2/0.75</b>	1 PAIR 0.75	7/0.37	6.4	75
<b>SOU02/2/0.75</b>	2 PAIR 0.75	7/0.37	9.0	135
<b>SOU04/2/0.75</b>	4 PAIR 0.75	7/0.37	11.3	175
<b>SOU07/2/0.75</b>	7 PAIR 0.75	7/0.37	13.4	270
<b>SOU10/2/0.75</b>	10 PAIR 0.75	7/0.37	16.3	370
<b>SOU14/2/0.75</b>	14 PAIR 0.75	7/0.37	18.4	490
<b>SOU19/2/0.75</b>	19 PAIR 0.75	7/0.37	21.1	640
<b>SOU24/2/0.75</b>	24 PAIR 0.75	7/0.37	23.6	800
<b>SOU30/2/0.75</b>	30 PAIR 0.75	7/0.37	26.1	960
<b>SOU01/4/0.75</b>	1 QUAD 0.75	7/0.37	7.3	100
<b>SOU01/2/1.0</b>	1 PAIR 1.0	7/0.43	7.9	75
<b>SOU02/2/1.0</b>	2 PAIR 1.0	7/0.43	10.2	130
<b>SOU04/2/1.0</b>	4 PAIR 1.0	7/0.43	11.9	195
<b>SOU07/2/1.0</b>	7 PAIR 1.0	7/0.43	14.2	320
<b>SOU10/2/1.0</b>	10 PAIR 1.0	7/0.43	17.5	450
<b>SOU14/2/1.0</b>	14 PAIR 1.0	7/0.43	19.5	590
<b>SOU19/2/1.0</b>	19 PAIR 1.0	7/0.43	22.4	760
<b>SOU24/2/1.0</b>	24 PAIR 1.0	7/0.43	25.2	960
<b>SOU30/2/1.0</b>	30 PAIR 1.0	7/0.43	27.7	1180
<b>SOU01/4/1.0</b>	1 QUAD 1.0	7/0.43	7.9	120
<b>SOU01/2/1.5</b>	1 PAIR 1.5	7/0.52	7.8	90
<b>SOU02/2/1.5</b>	2 PAIR 1.5	7/0.52	12.1	160
<b>SOU04/2/1.5</b>	4 PAIR 1.5	7/0.52	14.0	250
<b>SOU07/2/1.5</b>	7 PAIR 1.5	7/0.52	17.2	415
<b>SOU10/2/1.5</b>	10 PAIR 1.5	7/0.52	21.0	590
<b>SOU14/2/1.5</b>	14 PAIR 1.5	7/0.52	23.6	780
<b>SOU19/2/1.5</b>	19 PAIR 1.5	7/0.52	27.2	1010
<b>SOU24/2/1.5</b>	24 PAIR 1.5	7/0.52	30.5	1270
<b>SOU30/2/1.5</b>	30 PAIR 1.5	7/0.52	33.6	1570

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.



## RFOU SERIES

**NEK606 RFOU Fixed CBS**  
**Shipboard / Offshore Power Cable**  
**0.6/1kV 90°C**



### APPLICATIONS:

**Mud resistant** In accordance with NEK 606, the cables shall have a sheath (SHF MUD) that complies with the requirements in IEC 60092-359 for SHF 2 sheath materials.

**Oil & Gas** For control, lighting and power systems on oil and gas rigs.

**Marine** For fixed wiring installations on oil and gas rigs, shipboard and other marine applications requiring screened cable for EMC.

### PRODUCT FEATURES:

- ▶ Low smoke halogen free
- ▶ Mud resistant to NEK606
- ▶ PVC free
- ▶ Lloyds approved
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ To be earthed at both ends using EMC compatible glands
- ▶ Heat, oil and chemical resistant (See *Technical Section*)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded (Class 2).

**Insulation** Halogen free EPR (Ethylene Propylene Rubber).

**Inner Sheath** SHF 2, thermoset dual compound LSHF and oil/mud resistant.

**Screening** Tinned copper braid screen.

**Sheath** SHF 2, thermoset dual compound LSHF and oil/mud resistant.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -40°C to 90°C.

**Maximum Conductor temperature** 90°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

**Rated Voltage**  $U_0/U$  0.6/1kV.

**Max AC Operating Voltage**  $U_0$  0.7kV.

**Sheath Colour** Black.

**Standard Core Colours**

Single Core – White.


2 Core – White and Black.

3 Core – White, Black and Red.

4 Core – Off-White, Black, Red and Blue.

**Certification Society Approvals** Lloyds Register of Shipping.


**Relevant Standards** NEK606, IEC 60092-353, IEC 60092-351, IEC 60092-359, IEC 60754-1/2, IEC 61034-1, IEC 61034-2, IEC 60228, IEC 60332-3-22, **RoHS** Compliant.

Code	No. of Cores x Size  (mm <sup>2</sup> )	Approx. Stranding  No. of wires x mm	Approx. Overall Diameter  (mm)	Approx. Weight  (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed installation
					Touching or in ventilated ducts 
<b>RFOU1/16</b>	1 x 16	7/1.70	11.2	385	94
<b>RFOU1/25</b>	1 x 25	7/2.13	13.3	573	125
<b>RFOU1/35</b>	1 x 35	7/2.52	14.6	713	155
<b>RFOU1/50</b>	1 x 50	19/1.83	15.9	896	196
<b>RFOU1/70</b>	1 x 70	19/2.17	17.8	1160	248
<b>RFOU1/95</b>	1 x 95	19/2.52	20.1	1484	298
<b>RFOU1/120</b>	1 x 120	37/2.03	21.2	1758	354
<b>RFOU1/150</b>	1 x 150	37/2.27	23.0	2119	409
<b>RFOU1/185</b>	1 x 185	37/2.52	25.5	2558	470
<b>RFOU1/240</b>	1 x 240	61/2.24	28.9	3240	565
<b>RFOU1/300</b>	1 x 300	61/2.50	32.9	4050	650

Product table continued over ▶

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

## RFOU SERIES continued

Code	No. of Cores x Size	Approx. Stranding	Approx. Overall Diameter	Approx. Weight	Nominal Amps un-enclosed protected from sun @ 30°C fixed installation
	(mm <sup>2</sup> )	No. of wires x mm	(mm)	(Kg/Km)	Touching or in ventilated ducts 
RFOU02/1.5	2 x 1.5	7/0.52	14.4	317	25
RFOU02/2.5	2 x 2.5	19/0.41	15.5	373	33
RFOU02/4.0	2 x 4.0	19/0.52	17.1	460	44
RFOU02/6.0	2 x 6.0	19/0.64	18.3	546	56
RFOU02/10	2 x 10	49/0.51	20.2	724	79
RFOU02/16	2 x 16	49/0.65	22.7	957	106
RFOU03/1.5	3 x 1.5	7/0.52	15.0	349	25
RFOU03/2.5	3 x 2.5	19/0.41	16.1	417	33
RFOU03/4.0	3 x 4.0	19/0.52	17.8	521	44
RFOU03/6.0	3 x 6.0	19/0.64	19.1	627	56
RFOU03/10	3 x 10.0	49/0.51	21.1	857	79
RFOU03/16	3 x 16.0	49/0.65	23.6	1148	106
RFOU03/25	3 x 25.0	84/0.62	27.6	1609	119
RFOU03/35	3 x 35.0	133/0.58	30.9	2079	146
RFOU04/1.5	4 x 1.5	7/0.52	15.9	397	21
RFOU04/2.5	4 x 2.5	19/0.41	17.1	479	29
RFOU04/4.0	4 x 4.0	19/0.52	19.0	616	37
RFOU04/6.0	4 x 6.0	19/0.64	20.9	761	47
RFOU04/10	4 x 10.0	49/0.51	22.5	1009	67
RFOU04/16	4 x 16.0	49/0.65	25.6	1370	89
RFOU04/25	4 x 25.0	84/0.62	29.7	1938	119
RFOU04/35	4 x 35.0	133/0.58	33.3	2520	149
RFOU04/50	4 x 50.0	133/0.69	37.4	3387	187
RFOU04/70	4 x 70.0	189/0.69	42.6	4506	235
RFOU04/95	4 x 95.0	259/0.69	49.0	6042	282
RFOU04/120	4 x 120	336/0.67	52.6	7324	333
RFOU07/1.5	7 x 1.5	7/0.52	18.2	370	15
RFOU12/1.5	12 x 1.5	7/0.52	23.6	545	15
RFOU19/1.5	19 x 1.5	7/0.52	27.0	743	15
RFOU37/1.5	37 x 1.5	7/0.52	31.8	1291	15
RFOU07/2.5	7 x 2.5	19/0.41	19.9	657	20
RFOU12/2.5	12 x 2.5	19/0.41	25.5	1115	20
RFOU19/2.5	19 x 2.5	19/0.41	29.3	1516	20
RFOU27/2.5	27 x 2.5	19/0.41	34.6	2107	20
RFOU37/2.5	37 x 2.5	19/0.41	38.9	2662	20

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.



## MTR SERIES

Standard Performance Flexible  
Marine Trailer Cable  
50V AC / 120V DC 90°C



### APPLICATIONS:

**Marine** Pleasure crafts and other marine applications. These cables are flexible for installation and intermittent flexible use with free movement without tensile stress.

**Automotive** Trailer wiring.

### PRODUCT FEATURES:

- ▶ High electric and thermal conductivity
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** SPVC.

**Sheath** SPVC.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -20°C to 90°C / Flexing -5°C to 75°C.

**Maximum Conductor temperature** 90°C.

**Voltage Rating** AC 50V / DC 120V.

**Sheath Colour** Black (except 3 Core White).

#### Core Colour

3 Core Cable – White, Yellow, Brown.

5 Core Cable – White, Yellow, Brown, Red, Green.

7 Core Cable – White, Yellow, Brown, Red, Green, Blue, Black.

(Other Core colour combinations by quotation).


**Relevant Standards** AS/NZS 1125, IEC 60332-1,

**RoHS** Compliant.

Code	Nearest AWG	No. of Cores	Approx. Stranding No. of wires x mm	Nominal Area (mm <sup>2</sup> )	Industry Equivalent (mm)	AMP Rating at 30°C	Average Sheath Thickness (mm)	Average Insulation Thickness (mm)	Max D.C. Resistance at 20°C (m Ω/mt)	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
<b>MTR326030W</b>	14½	3	26/0.30	1.84	4.0	19	0.60	0.60	10.65	6.80	81.0
<b>MTR516020B</b>	20½	5	16/0.20	0.50	2.0	7	0.60	0.50	38.93	6.40	55.0
<b>MTR516030B</b>	16½	5	16/0.30	1.13	3.0	10	0.60	0.50	17.30	7.45	99.0
<b>MTR716030B</b>	16½	7	16/0.30	1.13	3.0	10	0.80	0.50	38.93	8.60	138.0

## MST SERIES

High Performance Flexible  
Appliance / Marine Wire 0.6/1kV 90°C

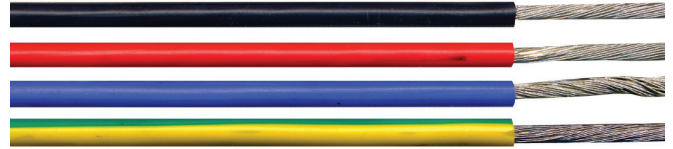

### APPLICATIONS:

**Power** Flexible thermal insulated wire suitable for switchboard wiring, motors and transformers.

**Marine** Tinned copper conductors for boat wiring and other marine applications.

**Audio** Amplifiers and audio equipment where oxygen-free copper wire is required.

### PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Metre marked 0.5mm to 25mm for better length control
- ▶ Oil and chemical resistant (See Technical Section)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** SPVC V-90HT.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -20°C to 90°C / Flexing 5°C to 75°C.

**Maximum Conductor Temperature** 105°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

**Rated Voltage** Uo/U 0.6/1kV.

**Minimum Bending Radius** Fixed 10 x cable diameter / Flexing 15 x cable diameter

#### Insulation Colour

0.5mm<sup>2</sup> ..... Red, White, Blue, Black, Grey, Brown, Pink, Orange, Green/Yellow, Violet, Yellow.

0.75 - 4.0mm<sup>2</sup> ..... Red, White, Blue, Black, Grey, Brown, Yellow, Violet, Orange, Green/Yellow, Pink.

6.0 - 10.0mm<sup>2</sup> ..... Red, White, Blue, Black, Green/Yellow.

16.0 - 25.0mm<sup>2</sup> ..... Red, White, Blue, Black, Green/Yellow.

**Relevant Standards** IEC 60228, IEC 60332-1, AS/NZS 3808, AS/NZS 3008.1, AS/NZS 3191, AS/NZS 1125, AS/NZS 5000.1,

CE Directive 2006/95/EC, **RoHS** Compliant.

Code	No. of Cores x Size (mm <sup>2</sup> )	Approx. Stranding No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Nominal Amps enclosed protected from sun @ 30°C fixed application		3 Phase Volt Drop @ 50Hz / MAX. Conductor Temp: 90°C (Mv/Am)
					In Duct or Cabinet		
MST000.50	1 x 0.50	16/0.20	2.5	10	7		86.100
MST000.75	1 x 0.75	24/0.20	2.8	15	10		52.936
MST001.0	1 x 1.0	32/0.20	2.9	17	15		46.800
MST001.5	1 x 1.5	30/0.25	3.4	20	17		30.000
MST002.5	1 x 2.5	50/0.25	4.1	32	23		16.400
MST004	1 x 4.0	56/0.30	4.8	50	31		10.200
MST006	1 x 6.0	84/0.30	5.3	70	39		6.810
MST010	1 x 10.0	80/0.40	6.8	116	52		4.050
MST016	1 x 16.0	128/0.40	8.1	177	70		2.550
MST025	1 x 25.0	200/0.40	10.2	281	89		1.620

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

## MBS SERIES

Standard Performance Flexible  
Marine Battery / Starter Cable  
50V AC /120V DC 75°C



### APPLICATIONS:

**Marine** Battery and starter cable. These cables are flexible for installation and intermittent flexible use with free movement without tensile stress.

**Audio** Oxygen free copper for audio applications.

### PRODUCT FEATURES:

- ▶ High electric and thermal conductivity
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See *Technical Section*)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** Special SPVC.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -20°C to 90°C / Flexing -5°C to 75°C.

**Maximum Conductor temperature** 90°C.

**Voltage Rating** AC 50V / DC 120V.

**Sheath Colour** Red or Black.

**Relevant Standards** AS/NZS 1125, IEC 60332-1,

**RoHS** Compliant.

Code	Approx. Stranding  No. of wires x mm	Nominal Area  (mm <sup>2</sup> )	Average Insulation Thickness  (mm)	Average Sheath Thickness  (mm)	Max D.C. Resistance at 20°C  (m Ω/mt)	Approx. Overall Diameter  (mm)	Approx. Weight  (Kg/Km)
<b>MBS8</b>	112/0.30	7.92	74	0.90	2.36	5.40	89.0
<b>MBS3</b>	364/0.30	25.70	170	1.60	0.72	10.20	289.0
<b>MBS0</b>	700/0.30	49.45	246	1.70	0.38	12.50	526.0



## MFE SERIES

Standard Performance Flexible  
Marine Figure 8  
50V AC/120V DC 75°C



### APPLICATIONS:

**Marine** Pleasure crafts and other marine applications. These cables are flexible for installation and intermittent flexible use with free movement without tensile stress.

**Audio** Oxygen free copper for speakers and audio controls.

### PRODUCT FEATURES:

- ▶ High electric and thermal conductivity
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** Special SPVC.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -20°C to 90°C / Flexing -5°C to 75°C.

**Maximum Conductor temperature** 90°C.

**Voltage Rating** AC 50V / DC 120V.

**Sheath Colour** Red and Red with black trace.

**Relevant Standards** AS/NZS 1125, IEC 60332-1, **RoHS** Compliant.

Code	Nearest AWG	Approx. Stranding No. of wires x mm	Nominal Area (mm <sup>2</sup> )	Industry Equivalent (mm)	AMP Rating at 30°C	Average Insulation Thickness (mm)	Max D.C. Resistance at 20°C (m Ω/mt)	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
<b>MFE216030</b>	16½	16/0.30	1.13	3.00	16	0.55	17.30	2.45 x 5.20	29.0
<b>MFE226030</b>	14½	26/0.30	1.84	4.00	22	0.55	10.65	2.80 x 5.90	43.0

## MTS SERIES

Standard Performance Flexible  
Marine Twin Sheath  
50V AC /120V DC 90°C



### APPLICATIONS:

**Marine** Pleasure crafts and other marine applications. These cables are flexible for installation and intermittent flexible use with free movement without tensile stress.

**Audio** Oxygen free copper for speaker wiring applications.

### PRODUCT FEATURES:

- ▶ Tinned copper conductor
- ▶ High electric and thermal conductivity
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** SPVC.

**Sheath** SPVC.

### CHARACTERISTICS:

**Temperature Range** Fixed -20°C to 90°C / Flexing -5°C to 75°C.

**Voltage Rating** AC 50V / DC 120V.

**Sheath Colour** Black, White.

**Core Colour** Red & Black.

**Maximum Conductor temperature** 90°C.


**Relevant Standards** AS/NZS 1125, IEC 60332-1,

**RoHS** Compliant.

Code	Nearest AWG	Approx. Stranding No. of wires x mm	Nominal Area (mm <sup>2</sup> )	Industry Equivalent (mm)	AMP Rating at 30°C	Average Sheath Thickness (mm)	Average Insulation Thickness (mm)	Max D.C. Resistance at 20°C (m Ω/mt)	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)
<b>MTS27032</b>	20½	7/0.32	0.56	-	10	0.60	0.50	38.93	3.20 x 5.20	27.0
<b>MTS216030</b>	16½	16/0.30	1.13	3.00	16	0.60	0.60	17.30	3.50 x 5.90	41.0
<b>MTS226030</b>	14½	26/0.30	1.84	4.00	22	0.60	0.60	10.65	3.90 x 6.70	57.0
<b>MTS250025</b>	13	25/0.50	2.50	-	34	0.80	0.80	7.98	4.40 x 7.50	80.0
<b>MTS241030</b>	12½	41/0.30	2.90	5.00	29	0.65	0.60	6.43	4.60 x 8.00	84.0
<b>MTS265030</b>	10½	65/0.30	4.59	6.00	40	0.80	0.80	4.26	5.50 x 9.50	125.0

## MTSV SERIES

Survey Compliant Flexible Twin  
Marine Cable 0.6/1kV 90°C

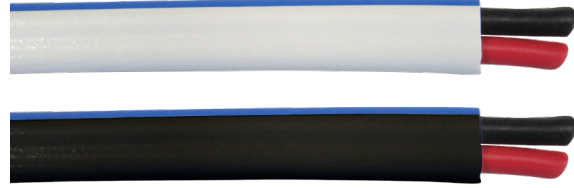

### APPLICATIONS:

**Marine** Suitable for wiring on pleasure craft and commercial vessels that require survey compliant cables.

### PRODUCT FEATURES:

- ▶ Tinned copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** XLPE.

**Sheath** PVC ST2.

### CHARACTERISTICS:

**Temperature Range** Fixed -20°C to 90°C.

**Voltage Rating** 0.6/1kV.

**Minimum Bending Radius** Fixed 10 x Cable Diameter.

**Sheath Colour** Black with Blue stripe, or White with Blue stripe.

**Core Colour** Red & Black.

**Maximum Conductor temperature** 90°C.

**Relevant Standards** AS/NZS 3004.1&2, IEC 60228,

IEC 60092-360, IEC 60092-350, IEC 60092-353, IEC 60332-3-22,

**RoHS** Compliant.

Code	Size (Core x mm)	Conductor Construction (mm)	Thickness of Insulation (mm)	Thickness of Sheath (mm)	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Max D.C. Resistance at 20°C (m Ω/mt)
<b>MTSV2/0.75</b>	2 x 0.75	24/0.2	0.8	1.0	4.8 x 7.6	38	26.7
<b>MTSV2/1.0</b>	2 x 1.0	32/0.2	0.8	1.0	5.0 x 8.0	53	20
<b>MTSV2/1.5</b>	2 x 1.5	48/0.2	0.8	1.1	5.4 x 8.6	60	13.7
<b>MTSV2/2.5</b>	2 x 2.5	80/0.2	0.8	1.1	5.8 x 9.4	90	8.21
<b>MTSV2/4.0</b>	2 x 4.0	127/0.2	1.0	1.2	7.0 x 11.6	130	5.09
<b>MTSV2/6.0</b>	2 x 6.0	190/0.2	1.0	1.2	7.9 x 13.4	143	3.39
<b>MTSV2/10</b>	2 x 10	318/0.2	1.0	1.3	9.2 x 15.8	310	1.95
<b>MTSV2/16</b>	2 x 16	504/0.2	1.0	1.4	10.4 x 18.0	403	1.24
<b>MTSV2/25</b>	2 x 25	770/0.2	1.2	1.6	12.7 x 22.2	615	0.795
<b>MTSV2/35</b>	2 x 35	703/0.25	1.2	1.7	14.7 x 26.0	765	0.565

## FTM SERIES

High Performance Flexible Twin Marine Cable 300/500V 75°C



### APPLICATIONS:

- Marine** Suitable for wiring on pleasure craft and other marine applications requiring flexible tinned copper conductors.
- Lighting** Used for festoon and garden lighting where a flexible cable is required.
- Audio** Amplifiers and audio equipment where oxygen free copper wire is required.

### PRODUCT FEATURES:



- ▶ Tinned fine stranded copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

### CONSTRUCTION:

- Conductor** Annealed tinned copper stranded high flexibility (Class 5).
- Insulation** Special SPVC V-75.
- Sheath** SPVC 4V-75.

### CHARACTERISTICS:

- Operating Temperature Range** Fixed -20°C to 75°C / Flexing -5°C to 75°C.
- Maximum Conductor Temperature** 75°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).
- Rated Voltage** U<sub>o</sub>/U 300/500v.
- Max AC Operating Voltage** U<sub>o</sub> 318v.
- Minimum Bending Radius** Fixed 10 x cable diameter / Flexing 15 x cable diameter.
- Sheath Colour** Black.
- Standard Core Colours** Red, Black.
- Relevant Standards** AS/NZS 1125, AS/NZS 3808, IEC 60332-1, **RoHS** Compliant.

Code	No. of Cores x Size (mm <sup>2</sup> )	Approx. Stranding No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application		1 Phase Volt Drop @50Hz / MAX. Conductor Temp: 75°C (Mv/Am)
					Spaced 	Touching 	
<b>FTM2/0.75</b>	2 x 0.75	24/0.20	4.2h x 6.5w	38	14	12	63.200
<b>FTM2/1.5</b>	2 x 1.5	48/0.20	4.6h x 7.2w	60	23	21	32.300
<b>FTM2/2.5</b>	2 x 2.5	80/0.20	5.4h x 8.8w	90	30	29	19.400
<b>FTM2/4.0</b>	2 x 4.0	127/0.20	6.2h x 10.5w	130	40	38	12.000

## TW-T SERIES

High Performance Flexible Twin Marine Cable 0.6/1kV 90°C



### APPLICATIONS:

**Marine** Flexible tinned copper for battery power supplies and winches.

**Automotive** Suitable for use as battery/jumper cables (indoor/ outdoor) and power leads for forklifts and field conveyers.

**Telecommunications** Where finely stranded large cross section cables are required for minimal volt drop.

**Audio** Power supply to amplifiers and audio equipment where oxygen free copper wire is required.

### PRODUCT FEATURES:

- ▶ Tinned fine stranded copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

### CONSTRUCTION:

**Conductor** Annealed tinned copper stranded high flexibility (Class 5).

**Insulation** SPVC.

**Sheath** Transparent SPVC.

### CHARACTERISTICS:

**Operating Temperature Range** Fixed -20°C to 90°C / Flexing -5°C to 75°C.



**Maximum Conductor Temperature** 90°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

**Rated Voltage** 0.6/1kV.

**Sheath Colour** Clear sheath.

**Core Colour** Red and Black.

**Relevant Standards** DIN VDE 0250, DIN VDE 472, IEC 60332-1, AS/NZS 1125, **RoHS** Compliant.

Code	No. of Cores x Size (mm <sup>2</sup> )	Approx. Stranding No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Max D.C. Resistance at 20°C (m Ω/mt)	Nominal Amps un-enclosed protected from sun @ 30°C fixed installation 1 Phase		1 Phase Volt Drop @50Hz / MAX. Conductor Temp: 75°C (Mv/Am)
						Spaced 	Touching 	
<b>TW02.5T</b>	2 x 2.5	80/0.20	5.5 x 12.0	90.0	7.410	30	29	19.400
<b>TW04T</b>	2 x 4.0	128/0.20	6.0 x 13.0	130.0	4.950	40	38	12.000
<b>TW06T</b>	2 x 6.0	192/0.20	6.5 x 14.0	220.0	3.300	51	48	7.496
<b>TW10T</b>	2 x 10.0	322/0.20	8.0 x 17.0	340.0	1.910	72	67	4.458
<b>TW16T</b>	2 x 16.0	511/0.20	9.80 x 19.60	453.0	1.210	95	89	2.807
<b>TW25T</b>	2 x 25.0	784/0.20	11.30 x 22.60	659.0	0.780	125	119	1.778
<b>TW35T</b>	2 x 35.0	714/0.25	12.80 x 25.60	894.0	0.550	156	146	1.282

Size	Duty Cycle Current Rating (Amps)			
	Welding, Automotive and Battery Charging (% of a 5 minute period @ 30°C)			
	100%	60%	30%	25%
<b>2 x 4.0</b>	42	54	77	82
<b>2 x 6.0</b>	62	80	113	120
<b>2 x 10.0</b>	100	107	126	134
<b>2 x 16.0</b>	139	152	187	200
<b>2 x 25.0</b>	183	209	265	285
<b>2 x 35.0</b>	227	264	243	370

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.