

## GMA2 SERIES

### Metal IP68 A2 Unarmoured Cable Gland C/W Locknut



#### APPLICATIONS:

**Glanding** For watertight glanding of unshielded/unarmoured circular cables.

#### OPTIONAL ACCESSORIES:

- ▶ PVC shroud
- ▶ Earth tag
- ▶ Adaptors and reducers



#### CONSTRUCTION:

**Material** Bright nickel plated extruded brass gland body and compression head BS2874 (CZ121 Brass).


**Seal** CPE (Neoprene) rubber.

**Insert** NBR (Nitril Butadienne Rubber).

#### CHARACTERISTICS:

**Operating Temperature Range** -60 to 150°C.

**Protection Class** IP68.

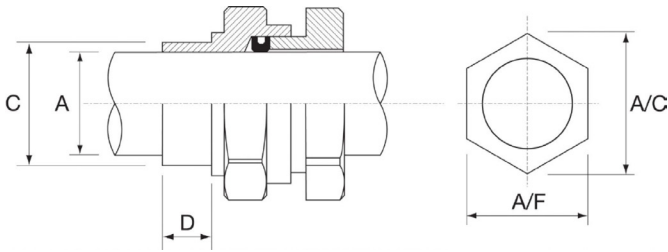

Code	Size	Entry Threads		Cable Overall Diameter		Hexagonal Size		PVC Shroud Code
		Dia. C (mm)	Length D (mm)	A (mm)		A/F (mm)	A/C (mm)	
				Min	Max			
<b>GMA216</b>	A2 - 16	16	15	3.50	8.50	19.0	22.0	GMSH16/20SS
<b>GMA220SS</b>	A2 - 20SS	20	15	3.50	8.50	22.0	25.0	GMSH16/20SS
<b>GMA220S</b>	A2 - 20S	20	15	8.00	10.80	22.0	25.0	GMSH20S
<b>GMA220</b>	A2 - 20	20	15	11.00	14.70	24.0	27.0	GMSH20
<b>GMA225S</b>	A2 - 25S	25	15	12.00	15.00	28.0	32.0	GMSH25
<b>GMA225</b>	A2 - 25	25	15	13.00	20.30	28.0	32.0	GMSH25
<b>GMA232</b>	A2 - 32	32	15	19.00	26.20	41.0	45.0	GMSH32
<b>GMA240</b>	A2 - 40	40	15	26.00	32.40	46.0	51.0	GMSH40
<b>GMA250</b>	A2 - 50	50	15	36.00	45.00	64.0	70.0	GMSH50
<b>GMA263S</b>	A2 - 63S	63	15	43.00	50.80	70.0	77.0	GMSH63S
<b>GMA263</b>	A2 - 63	63	15	48.00	56.50	75.0	83.0	GMSH63
<b>GMA275S</b>	A2 - 75S	75	20	55.00	62.00	84.0	93.0	GMSH75S
<b>GMA275</b>	A2 - 75	75	20	61.00	68.50	87.0	97.0	GMSH75
<b>GMA290</b>	A2 - 90	90	20	67.00	80.00	102.0	113.0	GMSH90