

# GLANDS & ACCESSORIES

## GMCW SERIES

**Metal IP66 CW Cable Gland for SWA Armoured Cables C/W Locknut**



### APPLICATIONS:

**Glanding** For glanding of Steel Wire Armoured (SWA) circular cables.

### OPTIONAL ACCESSORIES:

- ▶ PVC shroud
- ▶ Earth tag
- ▶ Adaptors and reducers



### CONSTRUCTION:

**Material** Bright nickel plated extruded brass gland body, armour locking ring and compression head BS2874 (CZ121 Brass).


**Seal** CPE (Neoprene) rubber.

**Insert** CPE (Neoprene) rubber.

### CHARACTERISTICS:

**Operating Temperature Range** -60°C to 150°C.

**Protection Class** IP66.

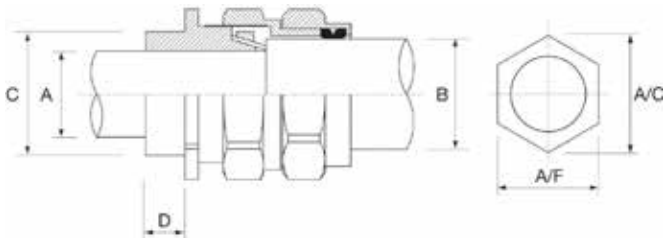

Code	Size	Entry Threads		Cable Bedding Diameter		Cable Overall Diameter		Hexagonal Size		PVC Shroud Code
		Dia. C (mm)	Length D (mm)	A (mm)		B (mm)		A/F (mm)	A/C (mm)	
				Min	Max	Min	Max			
<b>GMCW16</b>	CW-16	16	15	5.00	8.60	8.00	13.20	24.00	27.00	GMSH16/20SS
<b>GMCW20SS</b>	CW-20SS	20	15	5.00	8.60	8.00	13.20	24.00	27.00	GMSH16/20SS
<b>GMCW20S</b>	CW-20S	20	15	8.00	11.80	12.90	17.20	24.00	27.00	GMSH20S
<b>GMCW20</b>	CW-20	20	15	11.00	14.00	15.50	20.80	27.70	31.00	GMSH20
<b>GMCW25S</b>	CW-25S	25	15	12.00	17.00	17.50	24.00	31.50	35.00	GMSH25S
<b>GMCW25</b>	CW-25	25	15	13.00	20.30	20.00	27.20	35.00	39.00	GMSH25
<b>GMCW32</b>	CW-32	32	15	19.00	26.20	26.70	34.00	43.00	47.50	GMSH32
<b>GMCW40</b>	CW-40	40	20	25.00	32.20	33.00	40.50	51.50	57.00	GMSH40
<b>GMCW50S</b>	CW-50S	50	20	31.50	38.20	39.40	46.80	58.50	65.00	GMSH50S
<b>GMCW50</b>	CW-50	50	20	36.50	44.00	45.70	53.20	66.00	73.00	GMSH50
<b>GMCW63S</b>	CW-63S	63	20	42.50	50.00	52.10	59.00	72.00	80.00	GMSH63S
<b>GMCW63</b>	CW-63	63	20	49.10	56.00	58.40	66.00	80.00	89.00	GMSH63
<b>GMCW75S</b>	CW-75S	75	20	54.50	62.00	64.80	72.00	86.50	97.00	GMSH75S
<b>GMCW75</b>	CW-75	75	20	60.50	68.00	71.10	78.00	94.00	105.00	GMSH75
<b>GMCW90</b>	CW-90	90	20	66.00	79.00	77.00	90.00	106.00	118.00	GMSH90

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.