

GPM-SUP/GPG-SUP SERIES

Nylon Gland IP68 C/W Spiral Stress Relief Support (complete with Locknut)



APPLICATIONS:

Glanding For watertight glanding of unscreened circular cables with added protection of a spiral strain relief.

PRODUCT FEATURES:

- ▶ Sealing nut has a locking mechanism to hold cable firmly and to accommodate a wider cable range
- ▶ Long metric thread to aid installation.
- ▶ UL nylon 66 94v-2 halogen free
- ▶ UV stabilised
- ▶ Self extinguishing

CONSTRUCTION:

Material Black or Grey nylon body.

Seal EPDM rubber.


Washer EPDM rubber.

Insert Nylon traction relief clamping insert.

CHARACTERISTICS:

Operating Temperature Range -40°C to 100°C. Up to 120°C for short periods.

Protection Class Water rating IP68. Pressure rating 5 bar.

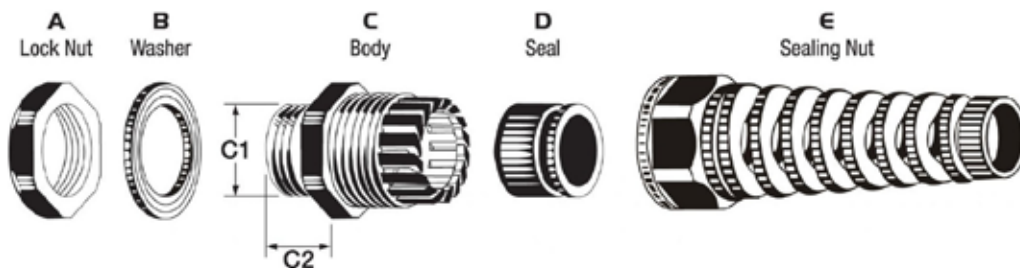

Available in Black or Grey

Code	Entry Thread (mm) C1	Thread Length (mm) C2	Cable Size Min - Max (mm)	Spanner Size A/E (mm)
GPM12SUP	M12 x 1.5	15.0	3.0 - 7.0	18/19
GPM16SUP	M16 x 1.5	15.0	4.0 - 10.0	22/22
GPM20SUP	M20 x 1.5	15.0	5.0 - 13.5	27/27
GPM25SUP	M25 x 1.5	15.0	10.0 - 18.0	33/33
GPG11SUP	18.60	10.0	4.0 - 10.0	24/22
GPG13.5SUP	20.40	10.0	5.0 - 12.5	27/24
GPG16SUP	22.50	11.0	6.0 - 14.0	30/27
GPG21SUP	28.30	12.0	10.0 - 17.5	36/33