


MTSV SERIES

Survey Compliant Flexible Twin Marine Cable 0.6/1kV 90°C

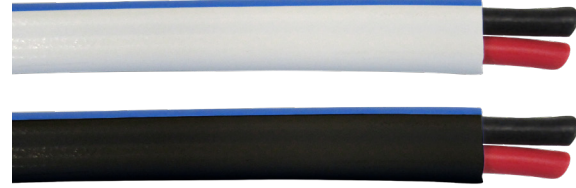

APPLICATIONS:

Marine Suitable for wiring on pleasure craft and commercial vessels that require survey compliant cables.

PRODUCT FEATURES:

- ▶ Tinned copper conductor
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation XLPE.

Sheath PVC ST2.

CHARACTERISTICS:

Temperature Range Fixed -20°C to 90°C.

Voltage Rating 0.6/1kV.

Minimum Bending Radius Fixed 10 x Cable Diameter.

Sheath Colour Black with Blue stripe, or White with Blue stripe.



Core Colour Red & Black.

Maximum Conductor temperature 90°C.

Relevant Standards AS/NZS 3004.1&2, IEC 60228,

IEC 60092-360, IEC 60092-350, IEC 60092-353, IEC 60332-3-22,

RoHS Compliant.

Code	Size (Core x mm)	Conductor Construction (mm)	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Max D.C. Resistance at 20°C (m Ω/mt)	Nominal Amps un-enclosed protected from sun @ 30°C fixed installation 1 Phase		1 Phase Volt Drop @50Hz / MAX. Conductor Temp: 75°C (Mv/Am)
						Spaced 	Touching 	
MTSV2/0.75	2 x 0.75	24/0.2	4.8 x 7.6	38	26.7	-	-	-
MTSV2/1.0	2 x 1.0	32/0.2	5.0 x 8.0	53	20	-	-	-
MTSV2/1.5	2 x 1.5	48/0.2	5.4 x 8.6	60	13.7	-	-	-
MTSV2/2.5	2 x 2.5	80/0.2	5.8 x 9.4	90	8.21	30	29	19.400
MTSV2/4.0	2 x 4.0	127/0.2	7.0 x 11.6	130	5.09	40	38	12.000
MTSV2/6.0	2 x 6.0	190/0.2	7.9 x 13.4	143	3.39	51	48	7.496
MTSV2/10	2 x 10	318/0.2	9.2 x 15.8	310	1.95	72	67	4.458
MTSV2/16	2 x 16	504/0.2	10.4 x 18.0	403	1.24	95	89	2.807
MTSV2/25	2 x 25	770/0.2	12.7 x 22.2	615	0.795	125	119	1.778
MTSV2/35	2 x 35	703/0.25	14.7 x 26.0	765	0.565	156	146	1.282

Duty Cycle Current Rating (Amps)

Welding, Automotive and Battery Charging (% of a 5 minute period @ 30°C)

Size	100%	60%	30%	25%
2 x 4.0	42	54	77	82
2 x 6.0	62	80	113	120
2 x 10.0	100	107	126	134
2 x 16.0	139	152	187	200
2 x 25.0	183	209	265	285
2 x 35.0	227	264	243	370

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.