



VSD CABLES

MDXCY-BK Series.....	84
MDXCY-CL Series	85
FDXCY Series.....	86
FDCY Series.....	87
KSXCY Series.....	88



CHEMTUFF VSD MDXCY-BK SERIES

Ultra Performance Flexible Rubber
VSD Marine / Power Cable 0.6/1kV
90°C



APPLICATIONS:

Chemtuff Used in applications that require a greater resistance to chemicals, solvents, oils and fats.

VSD Connection Designed for the connection of AC Variable Speed Drives (VSD) or where a flexible EMC screened cable is required. These cables are flexible for fixed installation as well as occasional flexing without tensile load.

RFI & EMI Protection With double screening (CBS & foil tape) and split interstitial earth cores (6mm² and above) this cable has optimum screening performance of low frequency and electromagnetic output.

Marine Flexible tinned copper VSD cable for installation in super yachts and other marine applications.

Pumping Suitable for permanent submersion up to 200 metres.

PRODUCT FEATURES:

- ▶ Helps avoid reactance with other devices outside the plant
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Moisture resistant
- ▶ Suitable for permanent submersion to 200 metres
- ▶ Resistant to environmental factors such as oxidation, ozone and sunlight
- ▶ To be earthed using an EMC compatible gland
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation X-90.

Bedding SPVC V-90HT.

Screening Up to 6.0mm 85% tinned copper braid screen c/w 100% foil screen coverage, 10mm and above 85% tinned copper braid screen, plus split earths.

Sheath SER105.

CHARACTERISTICS:

Operating Temperature Range Fixed -40°C to 90°C / Flexing -20°C to 90°C.

Maximum Conductor Temperature 90°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

Rated Voltage U_o/U 0.6/1kV.

Max AC Operating Voltage U_o 0.7kV.

Minimum Bending Radius Fixed 7.5 x cable diameter / Flexing 15 x cable diameter.


Sheath Colour Black.

Standard Core Colours

3 Core – Red, Black, Green/Yellow.

4 Core – Red, White, Blue, Green/Yellow.

Relevant Standards IEC 60228, IEC 60332-1, AS/NZS 5000.1, AS/NZS 1125, AS/NZS 3008, **RoHS** Compliant.

Code	No. of Cores x Size		Approx. Stranding Power No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Diameter Under Screen (mm)	Approx. Weight (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application	3 Phase Volt Drop @ 50Hz / MAX. Conductor Temp:
	Power (mm ²)	Earth (mm ²)					Fixed Installation Touching 	90°C (Mv/Am)
<i>Note - Up to 6.0mm 85% tinned copper braid screen c/w 100% foil screen coverage.</i>								
MDXCY3/1.5BK	2 x 1.5 + 1 x 1.5		30/0.25	12.5	8.6	155	25	30.000
MDXCY3/2.5BK	2 x 2.5 + 1 x 2.5		50/0.25	13.5	9.6	195	33	16.400
MDXCY4/1.5BK	3 x 1.5 + 1 x 1.5		30/0.25	13.5	9.5	195	21	30.000
MDXCY4/2.5BK	3 x 2.5 + 1 x 2.5		50/0.25	14.5	10.6	245	29	16.400
MDXCY4/4.0BK	3 x 4.0 + 1 x 4.0		56/0.30	16.5	12.7	350	37	10.200
MDXCY4/6.0BK	3 x 6.0 + 3 x 1.5		190/0.20	19.5	16.0	445	47	6.800
<i>Note - 10mm and above 85% tinned copper braid screen, plus split earths.</i>								
MDXCY4/10BK	3 x 10.0 + 3 x 1.5		312/0.20	21.5	17.9	675	67	4.050
MDXCY4/16BK	3 x 16.0 + 3 x 2.5		484/0.20	23.5	19.5	955	89	2.550

MDXCY-CL SERIES

High Performance Flexible VSD
Marine / Power Cable 0.6/1kV 90°C



APPLICATIONS:

VSD Connection Designed for the connection of AC Variable Speed Drives (VSD) or where a flexible EMC screened cable is required. These cables are flexible for fixed installation as well as occasional flexing without tensile load.

RFI & EMI Protection With double screening (CBS & foil tape) and split interstitial earth cores (6mm² and above) this cable has optimum screening performance of low frequency and electromagnetic output.

Marine Flexible tinned copper VSD cable for installation in super yachts and other marine applications.

Pumping Suitable for permanent submersion up to 200 metres.

PRODUCT FEATURES:

- ▶ Helps avoid reactance with other devices outside the plant
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Moisture resistant
- ▶ Suitable for permanent submersion to 200 metres
- ▶ Resistant to environmental factors such as oxidation, ozone and sunlight
- ▶ To be earthed using an EMC compatible gland
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed tinned copper stranded high flexibility (Class 5).

Insulation X-90.

Bedding SPVC V-90HT.

Screening Up to 6.0mm 85% tinned copper braid screen c/w 100% foil screen coverage.

Sheath Transparent PVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -40°C to 90°C / Flexing -20°C to 90°C.

Maximum Conductor Temperature 90°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

Rated Voltage U_o/U 0.6/1kV.

Max AC Operating Voltage U_o 0.7kV.


Minimum Bending Radius Fixed 7.5 x cable diameter / Flexing 15 x cable diameter.

Sheath Colour Clear.

Standard Core Colours

4 Core – Red, White, Blue, Green/Yellow.

Relevant Standards IEC 60228, IEC 60332-1, AS/NZS 5000.1, AS/NZS 1125, AS/NZS 3008, **RoHS** Compliant.

Code	No. of Cores x Size		Approx. Stranding Power No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Diameter Under Screen (mm)	Approx. Weight (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application	3 Phase Volt Drop @ 50Hz / MAX. Conductor Temp:
	Power (mm ²)	Earth (mm ²)					Fixed Installation Touching 	90°C (Mv/Am)
MDXCY4/1.5CL	3 x 1.5 + 1 x 1.5		30/0.25	13.5	9.5	195	21	30.000
MDXCY4/2.5CL	3 x 2.5 + 1 x 2.5		50/0.25	14.5	10.6	245	29	16.400
MDXCY4/4.0CL	3 x 4.0 + 1 x 4.0		56/0.30	16.5	12.7	350	37	10.200
MDXCY4/6.0CL	3 x 6.0 + 3 x 1.5		190/0.20	19.5	16.0	445	47	6.800

FDXCY SERIES

High Performance Flexible VSD Power Cable 0.6/1kV 90°C



APPLICATIONS:

VSD Connection Designed for the connection of AC Variable Speed Drives (VSD) or where a flexible EMC screened cable is required. These cables are flexible for fixed installation as well as occasional flexing without tensile load.

RFI & EMI Protection With double screening (CBS & foil tape) and split interstitial earth cores (6mm² and above), this cable has optimum screening performance of low frequency and electromagnetic output.

PRODUCT FEATURES:

- ▶ Helps avoid reactance with other devices outside the plant
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Moisture resistant
- ▶ Resistant to environmental factors such as oxidation, ozone and sunlight
- ▶ To be earthed using an EMC compatible gland
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed plain copper stranded high flexibility (Class 5).

Insulation X-90.

Screening 85% tinned copper braid screen c/w 100% foil screen coverage.

Sheath SPVC V-90.

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 90°C / Flexing -5°C to 90°C.

Maximum Conductor Temperature 90°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).

Rated Voltage U₀/U 0.6/1kV.

Max AC Operating Voltage U₀ 0.7kV.


Minimum Bending Radius 1.5mm² – 16mm²: Fixed 7.5 x cable diameter / Flexing 15 x cable diameter.

25mm² – 185mm²: Fixed 10 x cable diameter / Flexing 20 x cable diameter.

Sheath Colour Black.

Standard Core Colours Red, White, Blue, Green/Yellow.

Relevant Standards AS/NZS 5000.1, AS/NZS 1125, AS/NZS 3808, IEC 60332-1, **RoHS** Compliant.

Code	No. of Cores x Size		Approx. Stranding Power No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application	3 Phase Volt Drop @ 50Hz / MAX. Conductor Temp:
	Power (mm ²)	Earth (mm ²)				Fixed Installation Touching 	90°C (Mv/Am)
FDXCY4/1.5	3x1.5 + 1 x 1.5		30/0.25	10.6	175	21	30.000
FDXCY4/2.5	3x2.5 + 1 x 2.5		50/0.25	11.5	212	29	16.400
FDXCY4/4.0	3x4.0 + 1 x 4.0		56/0.30	12.8	288	37	10.200
FDXCY4/6.0	3x6.0 + 3 x 1.5		84/0.30	15.4	400	47	6.800
FDXCY4/10	3x10 + 3 x 1.5		140/0.30	16.8	544	67	4.050
FDXCY4/16	3x16 + 3 x 2.5		126/0.40	19.2	783	89	2.550
FDXCY4/25	3 x 25 + 3 x 4.0		200/0.40	24.6	1154	119	1.610
FDXCY4/35	3 x 35 + 3 x 6.0		280/0.40	27.3	1503	149	1.170
FDXCY4/50	3 x 50 + 3 x 10		400/0.40	32.1	2167	187	0.868
FDXCY4/70	3 x 70 + 3 x 10		356/0.50	35.9	2817	235	0.609
FDXCY4/95	3 x 95 + 3 x 16		485/0.50	42	3816	282	0.450
FDXCY4/120	3 x 120 + 3 x 16		614/0.50	43	4498	333	0.366
FDXCY4/185	3 x 185 + 3 x 35		944/0.50	58	6859	436	0.259

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.

FDCY SERIES

High Performance Flexible VSD Power Cable 0.6/1kV 80°C



APPLICATIONS:

VSD Connection Designed for the connection of AC Variable Speed Drives (VSD) or where a flexible EMC screened cable is required. These cables are flexible for fixed installation as well as occasional flexing without tensile load.

PRODUCT FEATURES:


- ▶ Helps avoid reactance with other devices outside the plant
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Moisture resistant
- ▶ Resistant to environmental factors such as oxidation, ozone and sunlight
- ▶ To be earthed using an EMC compatible gland
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed plain copper stranded high flexibility (Class 5).
Insulation PVC.
Screening 85% tinned copper braid screen.
Sheath SPVC.

CHARACTERISTICS:


Operating Temperature Range Fixed -40°C to 80°C / Flexing -15°C to 70°C.
Maximum Conductor Temperature 80°C (Current ratings are based on 30°C air temp. See technical section for de-rating factors).
Rated Voltage U_o/U 0.6/1kV.
Max AC Operating Voltage U_o 0.7kV.
Minimum Bending Radius Fixed 6 x cable diameter / Flexing 15 x cable diameter.
Sheath Colour Black.
Standard Core Colours Black (Numbered) Plus / Green/Yellow Earth.
Relevant Standards IEC60228, EN50525-2-51, IEC 60332-1,
RoHS Compliant, Conform to 2014/35/E4CE

Code	No. of Cores x Size	Approx. Stranding Power	Approx. Overall Diameter	Approx. Weight	Nominal Amps	3 Phase Volt Drop
		No. of wires x mm	(mm)	(Kg/Km)	un-enclosed protected from sun @ 30°C fixed application Fixed Installation Touching 	@ 50Hz / MAX. Conductor Temp: 80°C (Mv/Am)
FDCY5/2.5	5 x 2.5	50/0.25	15	457	20	16.400
FDCY5/4.0	5 x 4.0	56/0.30	17.3	661	25	10.200



KSXCY SERIES

High Performance Fixed Copper Tape
VSD Power Cable
Flexible Conductors for Fixed Applications

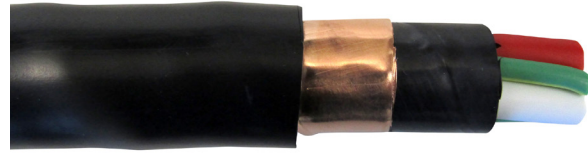

APPLICATIONS:

VSD Connection Fixed wiring cable designed for the connection of AC Variable Speed Drives or where a fixed EMC screened cable is required.

RFI & EMI Protection With single screening (Copper tape) and split interstitial earth cores (6mm² and above) this cable has optimum screening performance of low frequency and electromagnetic output.

Glanding Use Firstflex GM-EMC-FT Series glands for best contact.

PRODUCT FEATURES:

- ▶ Flexible Class 5 conductors for easy installation
- ▶ Helps avoid reactance with other devices outside the plant
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ To be earthed using an EMC compatible gland
- ▶ Heat, oil and chemical resistant (*See Technical Section*)

CONSTRUCTION:

Conductor Annealed plain copper stranded HIGH flexibility (Class 5).

Insulation X-90.

Bedding PVC 5V-90.

Screening Copper Tape 30% overlap.

Sheath SPVC.

CHARACTERISTICS:

Operating Temperature Range Fixed -30°C to 90°C

Maximum Conductor Temperature 90°C

Rated Voltage U_o/U 0.6/1kV.


Max AC Operating Voltage U_o 0.7kV.

Sheath Colour Black.

Standard Core Colours Red, White, Blue and Green/Yellow.

Relevant Standards IEC 60332-1, AS/NZS 3808,

AS/NZS 5000.1, AS/NZS 1125, AS/NZS 3008, **RoHS** Compliant.

Code	No. of Cores x Size		Approx. Stranding No. of wires x mm	Approx. Overall Diameter (mm)	Approx. Weight (Kg/Km)	Nominal Amps un-enclosed protected from sun @ 30°C fixed application Touching 	3 Phase Volt Drop @ 50Hz / MAX. Conductor Temp:
	Power (mm ²)	Earth (mm ²)					90°C (Mv/Am)
KSXCY4/1.5	3 x 1.5 + 1 x 1.5		30/0.25	13.3	250	21	30.000
KSXCY4/2.5	3 x 2.5 + 1 x 2.5		50/0.25	15.0	300	29	16.400
KSXCY4/4.0	3 x 4.0 + 1 x 2.5		56/0.30	15.3	378	37	10.200
KSXCY4/6.0	3 x 6.0 + 3 x 1.5		84/0.30	16.9	474	47	6.800
KSXCY4/10	3 x 10 + 3 x 1.5		80/0.40	17.8	612	67	4.050
KSXCY4/16	3 x 16 + 3 x 2.5		128/0.40	21.0	855	89	2.550
KSXCY4/25	3 x 25 + 3 x 4.0		200/0.40	24.4	1200	119	1.610
KSXCY4/35	3 x 35 + 3 x 6.0		280/0.40	27.2	1600	149	1.170
KSXCY4/50	3 x 50 + 3 x 10		400/0.40	32.7	2250	187	0.868
KSXCY4/70	3 x 70 + 3 x 10		356/0.50	35.7	2890	235	0.609
KSXCY4/95	3 x 95 + 3 x 16		485/0.50	42	3980	282	0.450
KSXCY4/120	3 x 120 + 3 x 16		614/0.50	46.3	4600	333	0.366
KSXCY4/150	3 x 150 + 3 x 25		765/0.50	48.4	5900	383	0.307
KSXCY4/185	3 x 185 + 3 x 25		944/0.50	57	7500	436	0.259
KSXCY4/240	3 x 240 + 3 x 35		1225/0.50	64	9600	519	0.216

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.