


SCAME Plugs

SCAME
feeling connected



Socket Front View

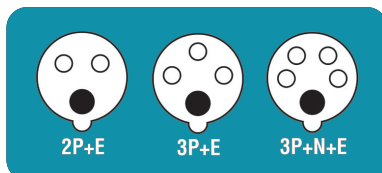

IP67 OPTIMA Plug

Code	Rating	Pins	Earth Position
110v YELLOW			
218.1630	16 Amp	2 P + E	4H
240v BLUE			
218.1633PTR	16 Amp	2 P + E	6H Ins. Perforation
218.1633TR	16 Amp	2 P + E	6H
226.1633	16 Amp	2 P + E	6H (Right Angle)
218.3233	32 Amp	2 P + E	6H
218.6333	63 Amp	2 P + E	6H
415v RED			
218.1636P	16 Amp	3 P + E	6H Ins. Perforation
218.1637P	16 Amp	3 P + N + E	6H Ins. Perforation
218.3236	32 Amp	3 P + E	6H
218.32364	32 Amp	3 P + E	3H* (Reefer)
218.3237	32 Amp	3 P + N + E	6H
218.6336	63 Amp	3 P + E	6H
218.6337	63 Amp	3 P + N + E	6H
218.12536	125 Amp	3 P + E	6H
218.12537	125 Amp	3 P + N + E	6H

* 3H = Refrigerated Container

Fittings 63 Amp and above have Pilot Pin and are IP67 Rated

IP44 OPTIMA Plug

Code	Rating	Pins	Earth Position
240v BLUE			
213.1633PTR	16 Amp	2 P + E	6H Ins. Perforation
213.1633TR	16 Amp	2 P + E	6H
213.3233	32 Amp	2 P + E	6H
415v RED			
213.1636P	16 Amp	3 P + E	6H Ins. Perforation
213.1638	16 Amp	2 P + E	9H
213.3236	32 Amp	3 P + E	6H
213.3237	32 Amp	3 P + N + E	6H



IP44 Angled Plug

Code	Rating	Pins	Earth Position
221.1633	16 Amp	2 P + E	6H

International Industrial Standard IEC60309-CEE17

Wiring and Installation

WIRING CAPACITY OF TERMINALS (mm ²)						MAX. CABLE SIZE ACCEPTED BY CABLE CLAMP		
Rated Voltage	Rated Voltage (A)	Plugs, Connectors and Appliance Inlets		Socket Outlets		Rated Current (A)	Outside Ø mm	
		Min	Max	Min	Max		Min	Max
Over 50V	16A	1	2.5	1.5	4	16A	8	15
	32A	2.5	6	2.5	10	32A	11.5	21
	63A	6	16	6	25	63A	17	31
	125A	16	50	25	70	125A	26	48

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.