


SCAME Socket Outlets

SCAME
feeling connected



Socket Front View

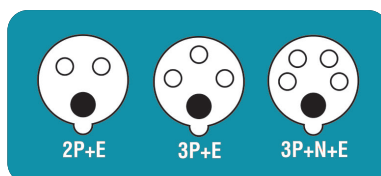

IP67 Socket Outlet

Code	Rating	Pins	Earth Position
110v YELLOW			
418.1660	16 Amp	2 P + E	4H
240v BLUE			
418.1663	16 Amp	2 P + E	6H
418.3263	32 Amp	2 P + E	6H
418.6363	63 Amp	2 P + E	6H
415v RED			
418.1666	16 Amp	3 P + E	6H
418.1667	16 Amp	3 P + N + E	6H
418.3266	32 Amp	3 P + E	6H
418.32664	32 Amp	3 P + E	3H* (Reefer)
427.3267	32 Amp	3 P + N + E	6H Reduced Base
418.3267	32 Amp	3 P + N + E	6H
418.6366	63 Amp	3 P + E	6H
418.6367	63 Amp	3 P + N + E	6H
418.12567	125 Amp	3 P + N + E	6H

* 3H = Refrigerated Container

Fittings 63 Amp and above have Pilot Pin and are IP67 Rated

IP44 Socket Outlet

Code	Rating	Pins	Earth Position
240v BLUE			
413.1663	16 Amp	2 P + E	6H
422.1663	16 Amp	2 P + E	6H Reduced Base
413.3263	32 Amp	2 P + E	6H

International Industrial Standard IEC60309-CEE17

Surface Mounting Junction Boxes


SCAME Straight Surface Box

570.0016	16 Amp
570.0032	32 Amp



SCAME Angle Box

570.0116	16 Amp
570.0132	32 Amp



SCAME Surface Box

570.0163	63 Amp
570.0125	125 Amp

