

GEM-STD SERIES

**Metal IP68 Standard Gland
for Unscreened Cables
Locknut Included**



APPLICATIONS:

Glanding For watertight glanding of unscreened circular cables.

PRODUCT FEATURES:

- ▶ Halogen free
- ▶ Phosphorous free
- ▶ Cadmium free
- ▶ Self extinguishing

CONSTRUCTION:

Material Bright nickel plated extruded brass gland body and compression head (Brass BS EN 50262 1999 / Brass extrusion BS 2874 CZ121 3Pb).

Seal Silicone rubber.


O-Ring PCP Silicone rubber.

Insert Nylon clamping claw.

CHARACTERISTICS:

Operating Temperature Range -40°C to 80°C. Up to 100°C for short periods.

Protection Class Water rating IP68. Pressure rating 5 bar.

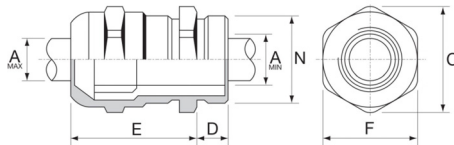

Code	Entry Thread (mm)	Thread Length (mm) D	Cable Size Min - Max (mm) A	Hexagonal Across Flats (mm) F	Hexagonal Circumference (mm) C	Assembled Length (mm) E
GEM16STD	M16×1.5	12	5.0 - 10.0	18	20.8	19
GEM20STD	M20×1.5	12	6.0 - 12.0	22	25.4	22
GEM25STD	M25×1.5	12	12.0 - 18.0	30	34.6	27
GEM32STD	M32×1.5	15	18.0 - 25.0	35	40.4	29
GEM40STD	M40×1.5	15	25.0 - 33.0	45	52.0	35
GEM50STD	M50×1.5	15	32.0 - 38.0	57	65.8	37
GEM63STD	M63×1.5	18	37.0 - 44.0	64	73.9	38