


FT20-CS SERIES

High Performance Multipair
Overall Foil Screened Tinned Data
Cable 110V 90°C

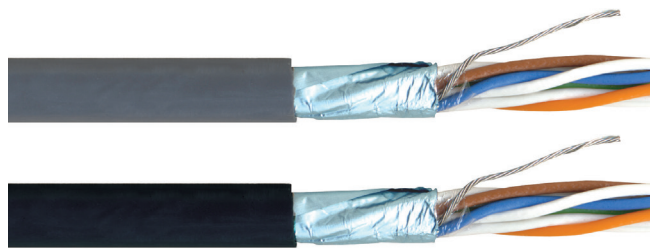

APPLICATIONS:

BUS Systems High performance, extra low capacitance cable suitable for RS232, RS422 POS, building and home BUS automation systems.

Data Suitable for connecting data terminal and data communication equipment.

E.L.V Signal and Controls (Does not exceed 50V AC or 120V DC Ripple Free) E.L.V power control or signal/instrumentation cables on machines, conveying equipment or similar industrial applications.

Marine Tinned copper conductors for use in marine applications.

PRODUCT FEATURES:

- ▶ Extremely pliable PVC sheath
- ▶ UV stabilised
- ▶ Flame retardant
- ▶ Extra low capacitance polyethylene insulation for extended pair operation
- ▶ Heat, oil and chemical resistant (See Technical Section)

CONSTRUCTION:

Conductor Annealed tinned copper stranded (Class 2).

Insulation Polypropylene (available in LSHF on request).

Screening Collective shield of aluminium/polyester foil complete with tinned copper drain wire.

Sheath Special SPVC V-90 (available in LSHF on request).

CHARACTERISTICS:

Operating Temperature Range Fixed -20°C to 90°C.

Maximum Conductor Temperature 90°C.

Rated Voltage 110VRMS/150VDC.

Minimum Bending Radius 10 x cable diameter.

Sheath Colour Grey, Black.

Standard Core Colours Each pair – (See Technical Section).

Relevant Standards AS/NZS 3808, **RoHS** Compliant.

| Electrical Characteristics | | | |
|---|----------|-------|---------|
| Property | | Value | Unit |
| DC Conductor resistance | @ 20°C | 89 | Ω/km |
| Capacitance between wires of a pair | | 50 | pF/m |
| Cross-talk attenuation between pairs | @ 1kHz | >90 | dB/100m |
| | @ 100kHz | >50 | dB/100m |
| Characteristic Impedance | @ 1kHz | 135 | Ω |
| Attenuation of a pair | @ 1kHz | 0.15 | dB/100m |
| | @ 10kHz | 0.42 | dB/100m |
| | @ 100kHz | 0.80 | dB/100m |
| | @ 150kHz | 0.90 | dB/100m |
| | @ 1.0MHz | 1.90 | dB/100m |
| | @ 1.5MHz | 2.40 | dB/100m |

| Code | No. of Cores x Size (mm ²) | Nearest AWG | Approx. Stranding No. of wires x mm ² | Approx. Overall Diameter (mm) | Approx. Weight (Kg/Km) |
|----------|---|-------------|---|----------------------------------|---------------------------|
| FT2001CS | 1 pair 0.22 | 24 | 7/0.20 | 4.2 | 22.9 |
| FT2002CS | 2 pair 0.22 | 24 | 7/0.20 | 5.6 | 40.9 |
| FT2003CS | 3 pair 0.22 | 24 | 7/0.20 | 6.2 | 48.4 |
| FT2004CS | 4 pair 0.22 | 24 | 7/0.20 | 6.7 | 57.9 |
| FT2005CS | 5 pair 0.22 | 24 | 7/0.20 | 8.4 | 74.1 |
| FT2006CS | 6 pair 0.22 | 24 | 7/0.20 | 7.9 | 83.5 |
| FT2008CS | 8 pair 0.22 | 24 | 7/0.20 | 8.5 | 99.0 |
| FT2010CS | 10 pair 0.22 | 24 | 7/0.20 | 10.1 | 120.1 |
| FT2012CS | 12 pair 0.22 | 24 | 7/0.20 | 10.8 | 133.9 |
| FT2018CS | 18 pair 0.22 | 24 | 7/0.20 | 12.8 | 179.7 |
| FT2025CS | 25 pair 0.22 | 24 | 7/0.20 | 15.1 | 236.1 |

Firstflex has taken every precaution to ensure accurate information in this catalogue, but accept no liability for any errors or omissions. Firstflex reserves the right to modify specifications at any time.